



BANVIL NATIONAL CUSTOMER SERVICE
Toll Free: 1-888-8BANVIL (1-888-822-6845)
775 Main St. E., Milton ON L9T 3Z3
Ph: 905-878-1080 Fax: 905-878-0272
E-mail: info@banvil2000.com


LED Wall-PACKS Light (Area Light)

DataSheet



Model :		TL-WMA351-02	TL-WMA501-02
OVERALL LAMP PARAMETERS	Input Voltage	100-277VAC (120V only when use a 120V rated photocell)	
	Input Current	0.5A @100V / 0.2A @277V	0.8A @100V / 0.3A @277V
	Input Power	35W	50W
	Power Factor	PF≥0.95	
	Luminance	2900LM	4200LM
	Luminous Efficiency	88LM/W	84LM/W
	CRI	>70	>70
	Beam Angle	120°	
	Main Structure	Aluminium + Tempered Glass	
LED DRIVER	Output Voltage	22-36VDC	22-36VDC
	Output Current	1.0A	1.4A
	Driver Efficiency	88%	89%
LED	LED Manufacturer	Bridgelux	Bridgelux
	LED Type	COB	COB
	LED Quantity	30PCS	40PCS
	LED Efficacy	110LM/W	110LM/W
	Color Temperature	WW/NW/CW (2700K-6500K)	
Photocell	-	dusk-to-dawn, UL listed, 120V rated or 110~277V rated option	
LIFESPAN & ENVIRONMENT	Lifespan	50000Hrs.	
	Warranty	3 Years	
	IP Rating	IP65, Wet Locations	
	Operating Temperature	-20°C—+40°C	
	Storage Temperature.Humidity	-40°C—+80°C , 10—90% RH	
SAFETY&EMC	Safety Norms	UL1598,UL8750, EN60598, EN61347-2-13, EN62031, EN62471	
	Withstand Voltage	I/P-FG: 2121VDC	
	Grounding Resistance	25A 100mΩ	
	Electromagnetic Compatibility	EN55015, EN61000-2-3, EN61000-3-3, EN61547	
OTHERS	Dimension	Pls refer to attached diamension drawing	
	Net Weight	3.5KG	
	Gross Weight	3.8KG	
	Packing Size	95x295x365mm	
	Q'ty / Carton	1PCS	
	Volume	0.042Cbm/carton	

Dimension:

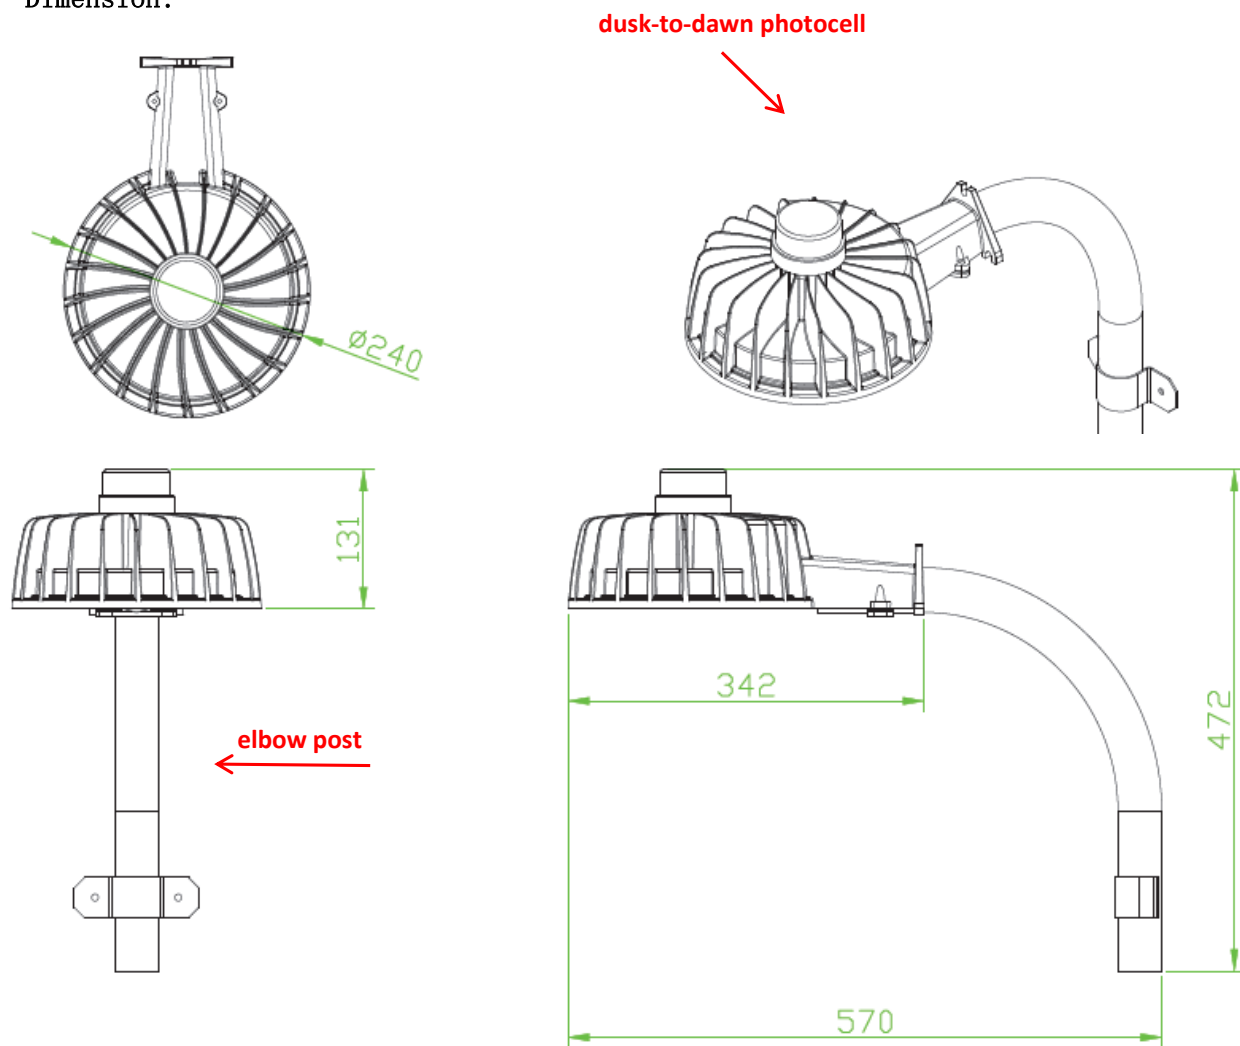

Note: The elbow post is included in the packaging.