



LED CHANDELIER

LCH146A37
11/17

QUESTIONS OR CONCERNS CONTACT AT:
1-800-265-1833 (English) / 1-800-567-2513 (French)
Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers



Wrench


Wiring supplies
as required by
local electrical
code

SAFETY PRECAUTIONS:

1. **TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
2. **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
3. **CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL BOX.**
4. **TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.**

NOTE: Product may not look exactly as shown in figures.

INSTALLATION:

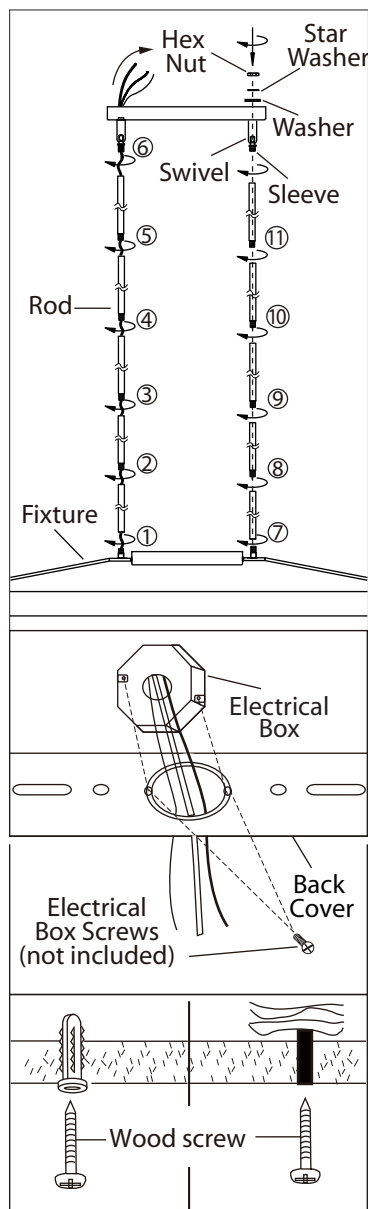


1. Install the rods as shown. Screw the rod 1 first. Install swivel to the rod, ensuring that the sleeve is at the swivel.

2. Tighten the hex nut, star washer and washer to the stem on the canopy.

3. Feed power cords from the electrical box through the centre hole of the back cover. Align holes of back cover over electrical box and secure with electrical box screws (not included).

NOTE: Make sure the back cover is level before tightening the screws.
Position the fixture and add wood screws (one on each side) for the wooden studs or plastic wall anchor and wood screws for dry wall.

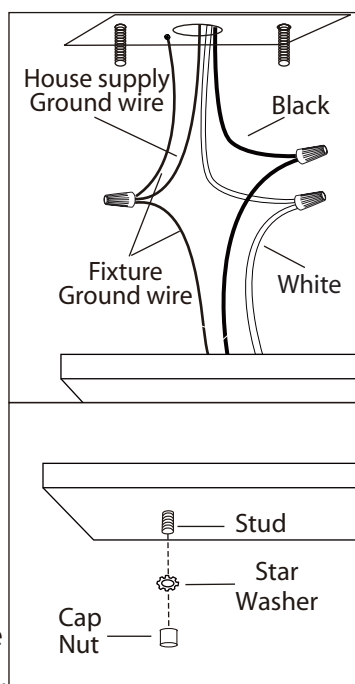

4. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical box. Connect the black wire from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.


5. Once connections of wires are completed, carefully tuck wires and wire nuts into the electrical box making sure no bare wire (on the black and white) is visible at the wire nuts.

6. Position fixture over studs on mounting bracket assembly. Secure fixture in place with star washers and cap nuts.




dimable

This LED light is suitable to be dimmed by
LEVITON# 742-6672-HLW , 722-6674-PDW MAX 150 W,
Lutron # SCL-153PH-WH MAX 150 W.
The MAX rated wattage of this model is 36 W

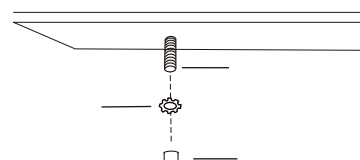

Re-wiring shall be only conducted by a qualified person or by a person familiar with the construction and operation of the product and the hazards involved.

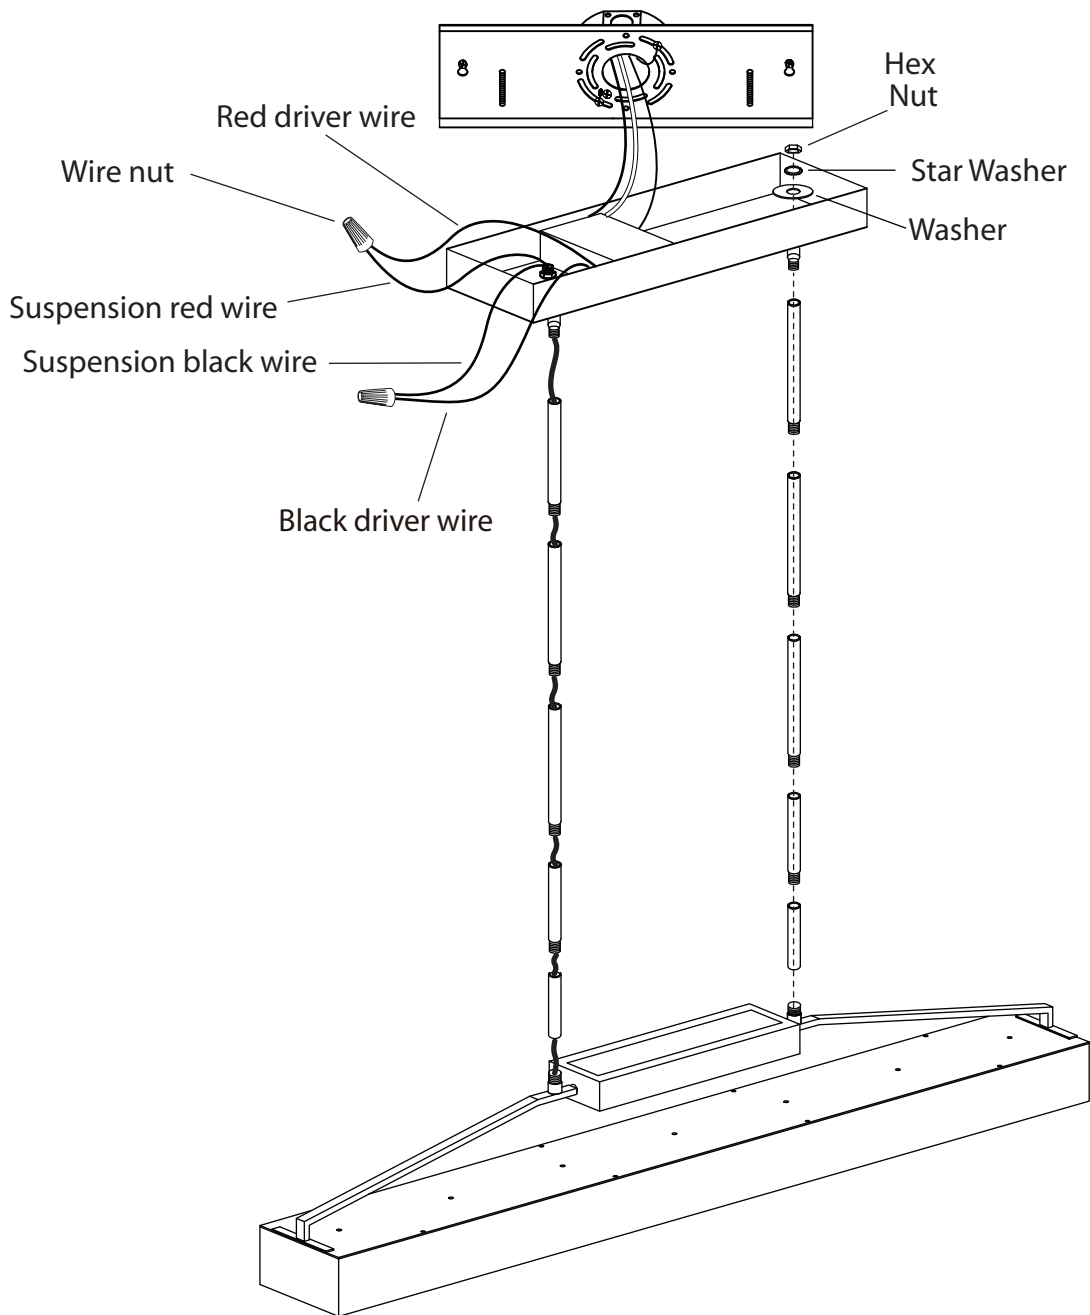

Shortening the suspension cord wires requires special attention to the connections of the driver wires and the suspension cord wires. Cut the tie holding the wires together. Unscrew the 2 wire nuts. When removing the excess cord wire, make sure there is enough wire (about 6 inches) above the strain relief to complete the connections to the driver. Re-tie a knot on the suspension cord before re-wiring.

Strip insulation 1/2" from the end of the 2 suspension wires. Reattach the suspension cord wires to the wires of the driver by the 2 wire nuts. **Connect the black wire from the suspension wire to the black wire from the driver. Connect the red wire from the suspension wire to the red wire from the driver.**

Use UL or CSA approved electrical tape to wrap the 2 wire nuts after connection. Use a cable tie to re-tie all the wires for strain relief.

For other steps, please refer to page 1.



CHANDELIER AU DEL

LCH146A37
11/17

QUESTIONS OU INFORMATION COMMUNIQUE AVEC AU:

1-800-265-1833 (Anglais) / 1-800-567-2513 (Français)

Du lundi au vendredi entre 8:00H et 17:00H H.N.E.



INSTRUCTIONS CONCERNANT LE RISQUE
D'INCENDIES OU LES DOMMAGES CORPORELS
LISEZ TOUTES LES INSTRUCTIONS

INSTRUCTIONS DE SÛRETÉ IMPORTANTES GARDEZ CES INSTRUCTIONS

OUTILS ET MATERIAUX REQUIS:



Tournevis A
Phillips



Coupeur De Fils



Pincettes



Clef


Fournitures
électriques telles
que prescrites
par les normes
locales

MISE EN GARDE:

1. FERMER LE COURANT AU DISJONCTEUR AVANT DE DÉBUTER L'INSTALLATION DE LA FIXTURE.
2. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
3. BRANCHER LES FILS DE LA MISE A TERRE (CUIVRE NU OU VERT) DE VOTRE LUMINAIRE AU FIL DE LA MISE À TERRE (CUIVRE NU OU VERT) OU VIS DE LA MISE À TERRE DANS LA BOÎTE ÉLECTRIQUE.
4. POUR NETTOYER LE LUMINAIRE, L'ÉTEINDRE, ATTENDRE QU'IL SOIT FROID, PUIS LE NETTOYER AVEC LINGE PROPRE ET DOUX.

N.B.: Peut différer de illustration.



INSTALLATION:

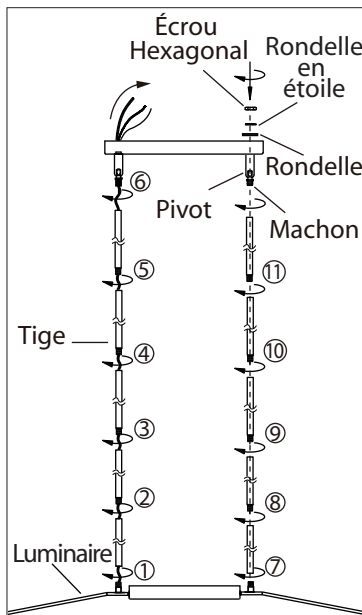

1. Poser les tiges tel qu'illustré. Visser la tige 1 en premier. Installez le pivot sur la colonne en vous assurant que le manchon est au niveau du pivot.


2. Serrer l'écrou hexagonal, la rondelle étoilée et la rondelle de la tige située sur la cloche.

3. Faufilez les fils de la boîte électrique en travers du trou au centre du couvercle arrière. Alignez les trous du couvercle arrière avec les trous sur la boîte électrique et fixez en place à l'aide des vis pour la boîte électrique (en sus).

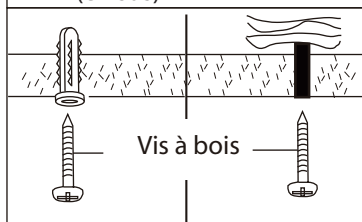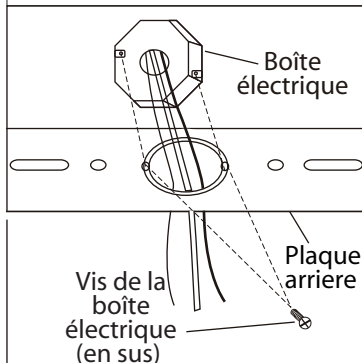

N.B.: Assurez-vous que le couvercle arrière est bien de niveau avant de le serrez avec les vis.

Placez le luminaire et ajoutez des vis à bois (une de chaque côté) sur les structures de bois ou des ancrés en plastique accompagnés de vis à bois sur du placoplatre.

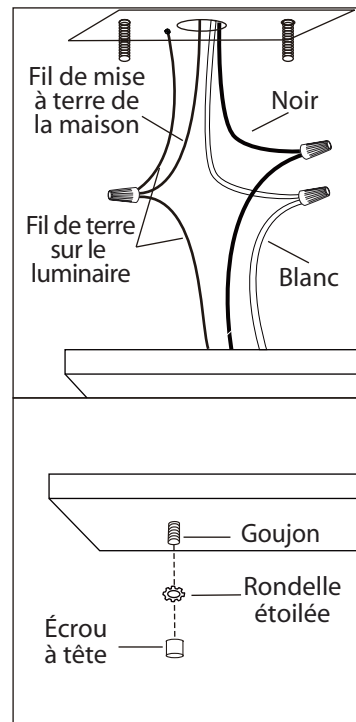

4. Branchez les fils de la mise a terre (cuivre nu ou vert) de votre montage au fil de la mise A terre (cuivre nu ou vert) ou vis de la mise à terre dans la boîte électrique. Posez le fil noir de la fixture au fil noir dans la boîte électrique et posez le fil blanc de la fixture au fil blanc dans la boîte.

5. Une fois les connexions terminées, poussez soigneusement les fils et les marrettes dans la boîte électrique en vous assurant qu'aucun fil dénudé (sur les fils noirs et blancs) est visible des marrettes.

6. Placer le luminaire sur les goujons sur la ferrure de montage. Serrez le luminaire en place à l'aide des écrous étoilés et les écrous à capuchon.



variable


Cette luminaire DEL est compatible avec les variateurs d'intensité suivant :

LEVITON# 742-6672-HLW , 722-6674-PDW MAX 150 W,

Lutron # SCL-153PH-WH MAX 150 W.

Le maximum de wattage permis avec ce modèle est de 36 W

La mise sous tension doit être faite par un électricien qualifié ou une personne familière avec l'électricité et les risques inhérents.

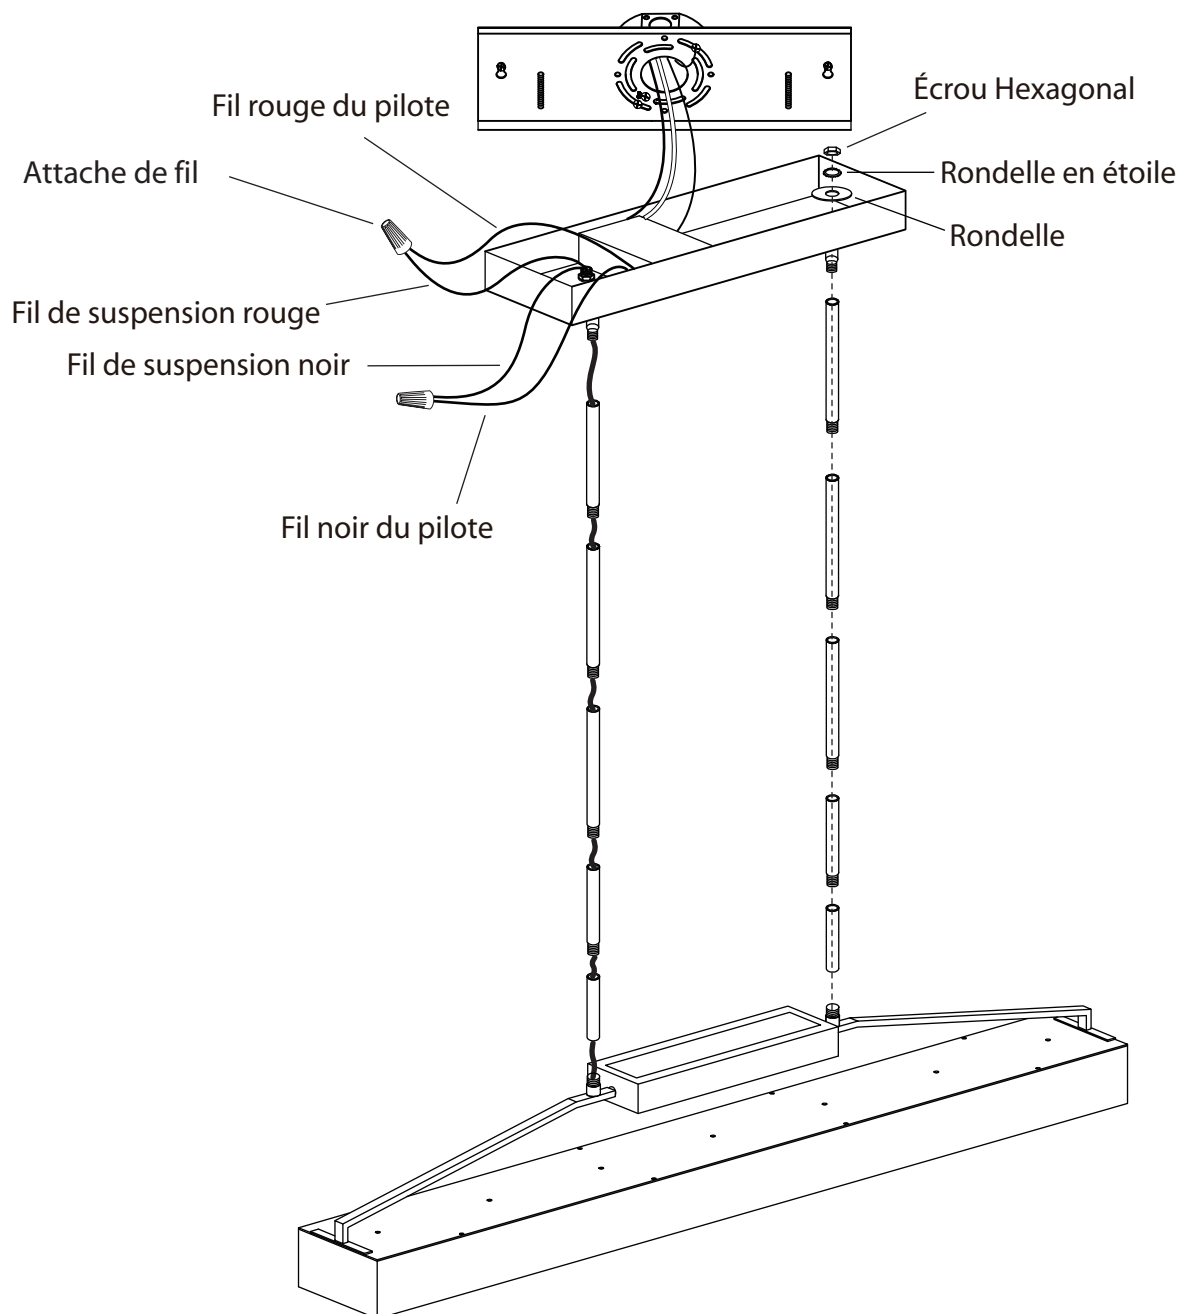

Raccourcir les fils de suspensions demande une attention spéciale portée aux fils du pilote ainsi qu'aux fils de suspension. Couper l'attache retenant les fils ensemble. Dévisser les 2 attaches de fils. En enlevant l'excès de fil, s'assurer qu'il restera assez de fil (environ 6 pouces) au dessus de l'anneau de rétention pour compléter les branchements au pilote. Refaire un nœud sur le cordon de suspension avant de rebrancher.

Dégainer les 2 fils de suspension à environ 1/2" du bout. Poser à nouveau les fils de la suspension au fils sur le pilote à l'aide des 2 attaches de fils. **Poser le fil noir de suspension noir au fil noir du pilote. Poser le fil rouge de suspension au fil rouge du pilote.**

Utiliser un ruban électrique approuvé UL ou CSA (ACNOR) pour entourer les 2 fils après avoir terminé les connexions. Utiliser une attache pour lier tous les fils à l'anneau de rétention.

Pour toutes les étapes, voir la page 1