

Date:	Project Name:
Type:	Part Number:



T5 TYPE B



FEATURES

- Built-in safety switch prevents electrical shock during installation
- Operates directly on 120-347V line voltage
- Direct replacement for T5/HO Fluorescent Lamp Rated for use in fully enclosed fixtures.
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifetime L70(hrs): >50,000
- 7 year warranty

APPLICATIONS

- Food Service Equipment
- Office Lighting
- Residential
- Retail Lighting




Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R42121	RENO-LEDT5BP-25W-MCCT-48G	25W	4FT	120-347V	3300 lm	G5	330°	3000K
					3450 lm			3500K
					3500 lm			4000K
					3600 lm			5000K
					3400 lm			6500K


DIMENSIONS

4FT

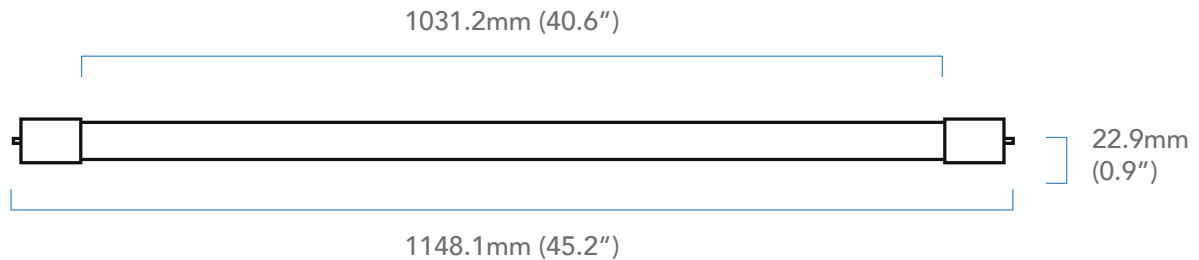


PROTECTION FEATURES

INTERNAL SAFETY SWITCH

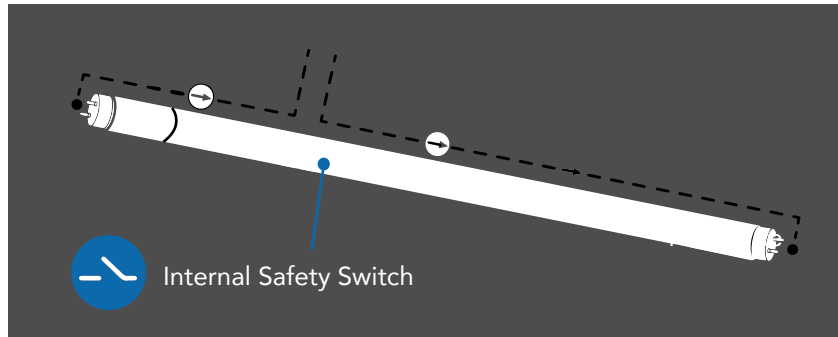

Internal Safety Switch for installation protection.
(No current will flow until pins on both ends are engaged)

MISUSE PROTECTED FUNCTION

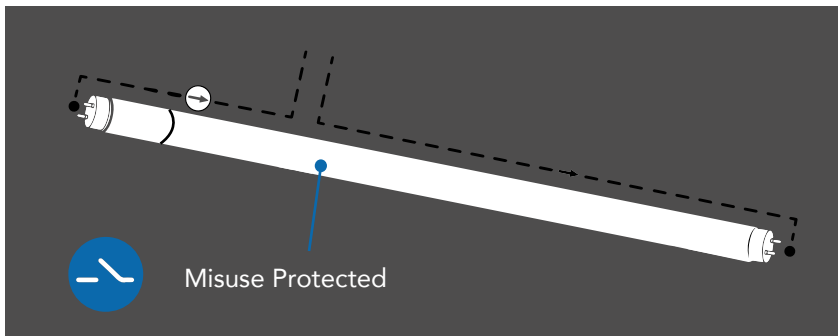


Misuse - Protected function if forgot to by-pass the ballast, the lamp won't work, no risk of fire or cap melting.

DOUBLE-ENDED WIRING DIAGRAM

1. Cut all existing connections to ballast as shown below and remove ballast.
See Figure A above for typical ballast configurations.
2. Re-wire fixture as shown below. For Double-ended wiring, use either shunted or nonshunted lampholders.

Note: There should not be any exposed wires at the end of installation.

Shunted Lampholders

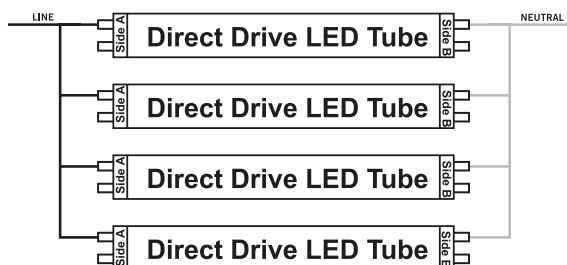

Nonshunted Lampholders

