



OVVIO RM


10" NEMA 3R Sign

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- 10" height pictogram for great visibility
- AC Only, Self-Powered or Universal DC
- Tamper proof screws for added protection (optional)
- Solid state transfer technology
- Durable 16 gauge steel housing
- Damp and wet location rated
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C
- Product complies with Special Inspection, pending CSA certification

DIMENSIONS

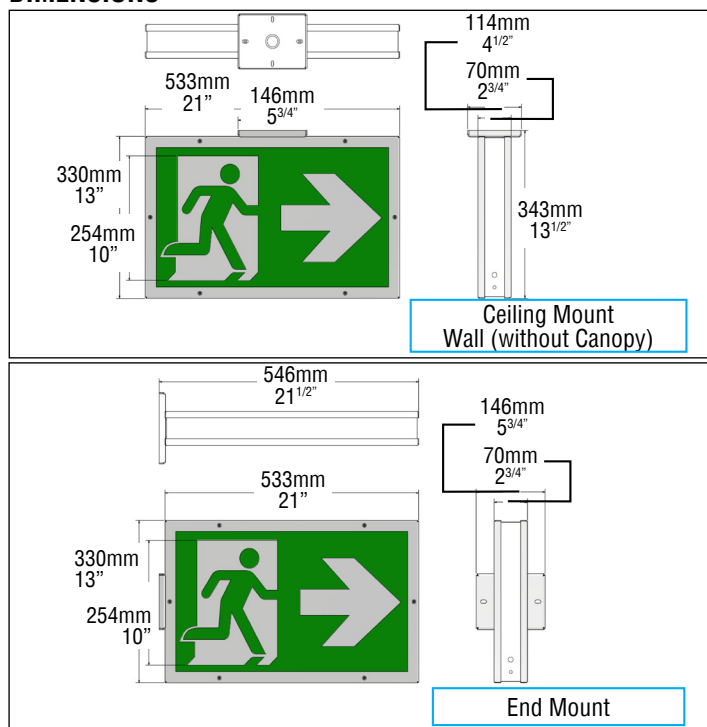

EXTERNAL SPECIFICATIONS

The OVVIO housing is constructed from durable 16 gauge CRS (steel). The housing is fully gasketed for wet location applications and is supplied standard in a white finish. Wall, ceiling or end mounting configurations are available and must be specified. Single or double face versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY: standard 120/347VAC or 120/277VAC input
SELF-POWERED: Standard self-powered versions use sealed nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

OV-RM - - - - -

SERIES	OPERATION	FACE #	PICTOGRAM	² MOUNTING	VOLTAGE	OPTIONS
OV-RM	Blank (AC only) SP (Self-Powered)	1 (Single) ¹ 2 (Double)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	F(120/347) E(120/277)	UDC (6 -24 Volt DC) TP (Tamper proof screws) 90SP (90 minute emergency) 120SP (120 minute emergency) ³ FAI (Fire alarm interface - specify) SW-OL (RM no indicator, left) SW (Special wording) CC (Custom Colour) PK12 (Dry location)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Mounting must be specified; ³Specify open/closed/6-24 VAC