

| |
|----------------------|
| Project: |
| Type: |
| Date: |
| Product Code: |
| Approval: |



Stylish performance with fluorescent lighting.

BFHL

Industrial-grade, suspended-mount fluorescent high bay fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its multi-faceted reflector makes it ideally suited for general area illumination.

FEATURES

- Available in 4' or 8' lengths (custom sizes available)
- Pre-painted, high-reflectance white body
- Available with 1, 2, 3 or 4 lamp configurations
- T5 or T8 lamps

OPTIONS

- 4', 8' and custom lengths available (consult factory)
- Continuous row-mounting available
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 1, 2, 3 or 4 lamps available
- T5 or T8

APPLICATIONS

- Retail stores
- Storage areas
- Warehouse facilities

APPROVALS

- ETL listed product

OPTICS

Pre-painted body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. 1 to 4 lamp cross sections available to suit most applications. T5 and T8 light sources are available.

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

MOUNTING

Can be row-mounted using a suspended or surface-mount configuration. Optional mounting is available with aircraft cable, chain or stem mounting. Optional mounting bracket for surface mounting.


CONSTRUCTION

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. Knock-outs provide easy through wiring for row-mounted applications.




PRODUCT DIMENSIONS

End View



Side View

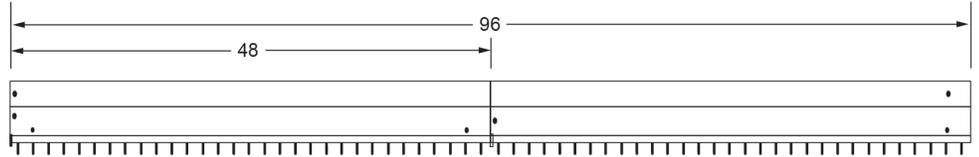

PRODUCT KEY

| Fixture Type | Fixture Length | Number of Lamps | Lamp Watts | Lamp Type | Ballast Voltage | Ballast Factor | Options |
|--------------|----------------------|-------------------------|------------------------|----------------------|----------------------|----------------------|----------------------|
| BFHL | <input type="text"/> | <input type="text"/> LP | <input type="text"/> W | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| | 4' | 1 | 28 | T5 | 120 | Normal (N) | |
| | 8' | 2 | 32 | T8 | 120/277 (UNV) | High (H) | |
| | | 3 | 54 | | 347 | Low (L) | |
| | | 4 | | | | | |
| | | 6 | | | | | |
| | | 8 | | | | | |

OPTIONS

| | | |
|---|--|--|
| <p>Battery Back-Up (Needs to be specified)</p> <p>Hangers M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15') M25 - Surface Mounting Bracket</p> | <p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p>Sensors W12 - Motion Sensor - 10C W26 - Motion Sensor with Photocell</p> | <p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> |
|---|--|--|

