

## QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English)

1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

## TOOLS AND MATERIALS REQUIRED:



Phillips  
Screwdriver



Wire Cutters

Wiring supplies  
as required by  
electrical code



Pliers



Wrench



"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"

"READ ALL INSTRUCTIONS"

## "IMPORTANT SAFETY INSTRUCTIONS"

"SAVE THESE INSTRUCTIONS"

## SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.

**NOTE: Product May Not Look Exactly As Shown In Figures.**

## INSTALLATION:




Fig. 1

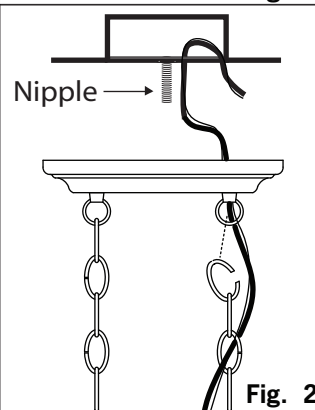


Fig. 2

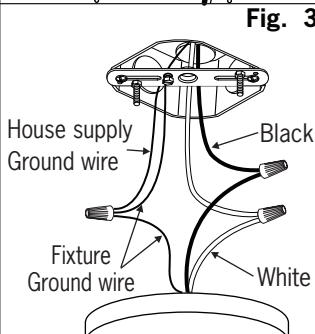


Fig. 3

1. Attach the mounting bracket to the outlet box using electrical box screws (not included) and flat washers. Attach the nipple to the mounting bracket and adjust until it will clear the canopy when assembled (Place the canopy over the nipple and tighten the upper connector onto the nipple until snug. The upper connector should hold the canopy snug to the ceiling). Lock the nipple in the correct position using the hex nut. (See Fig.1)

2. Spread one end of chain open and fasten the upper loop. Hang the chain to the upper loop and close the opening. Repeat the same for another chain connection. Feed the cord and ground wire through the chain and the upper loop. (See Fig.2)

3. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box. (See Fig.3)




Fig. 4




Fig. 5

4. Secure the canopy in place and tighten with the star washer and cap nut. (See Fig.4)

5. Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. (See Fig.5)

6. Install proper bulb type and wattage.