



LED SLIMLINE CEILING OR WALL MOUNT

LED-M001WT-C
LED-M002WT-C

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY
INSTRUCTIONS**
SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters

Wiring supplies
as required by
electrical code



Pliers




Wrench


SAFETY PRECAUTIONS:

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- 3. CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**


INSTALLATION:




- 1.** Remove lens by gently rotating and lifting lens from fixture.

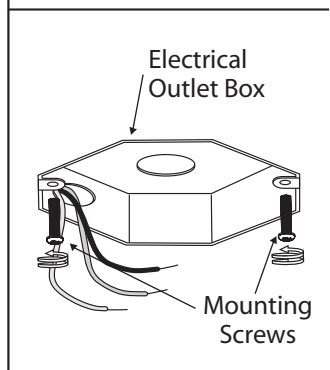


- 2.** Place mounting screws (included) in electrical box screwing in halfway.

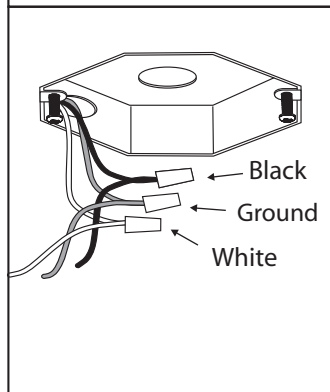


- 3.** Connect ground wire (green) from fixture to ground wire from electric box. Connect black wire from fixture to black wire from electrical box. Connect white wire from fixture to white wire from electrical box.



- 4.** Attach fixture to mounting screws, turn fixture counter-clockwise to lock.



- 5.** Secure fixture by tightening mounting screws.



- 6.** Return lens to fixture. Hold lens up to fixture, and rotate until notches in lens line up with tabs in fixture. Continue rotating until locked.

This light fixture is suitable to be dimmed by Lutron# CTCL-153PD wall dimmer.