

SPECIFICATION SHEET

SUBJECT

LED EMERGENCY LIGHT

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

This remote emergency light head is constructed of high impact thermoplastic. Clear PC lens and aluminum reflector provide bright illumination. Adjustable swivel locks the lamp head position.

SPECIFICATION FEATURES

Construction

Injection-moulded thermoplastic ABS housing
UL94V-0 flame rating
Clear PC lens and aluminum reflector provide bright illumination
Suitable for wall mounting and ceiling mounting
Standard canopy is designed to mount directly to typical electrical junction boxes

Electrical

DC5V - DC12V Input Voltage
SMD 2W high power LED, CCT 6000K for emergency lamp heads
Ambient temperature 5°C to 30°C
Suitable for damp locations

Finish

White

Compliance


CSA listed and meets all requirements in C22.2 No. 141-10

Warranty

2 years



**CM SERIES
REMOTE
EMERGENCY
LIGHT HEAD
(SINGLE)**

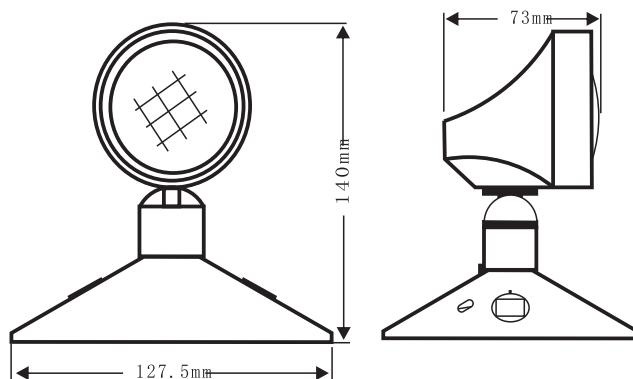

CM201A
Dimensions
mm | 128(Ø) x 140(H)
inch | 5(Ø) x 5.5(H)





ORDERING CODE, ENERGY AND PERFORMANCE DATA


Model No.	Voltage (V)	Lamp Head	Lumen Output	Certification	Type
 CM201A	DC5V-DC12V	2W	180 lm		Standard

PHOTOMETRICS

Luminous intensity distribution

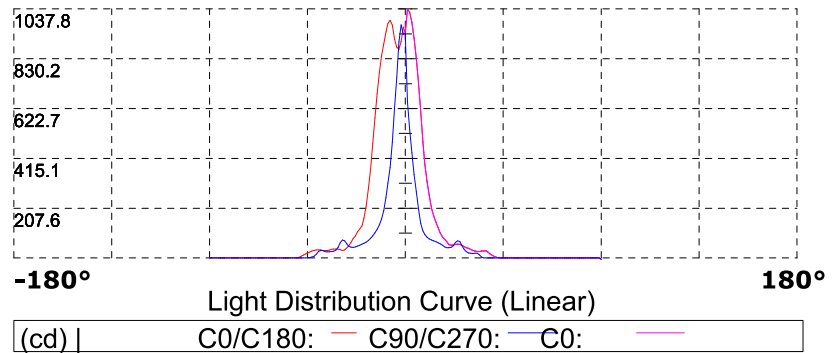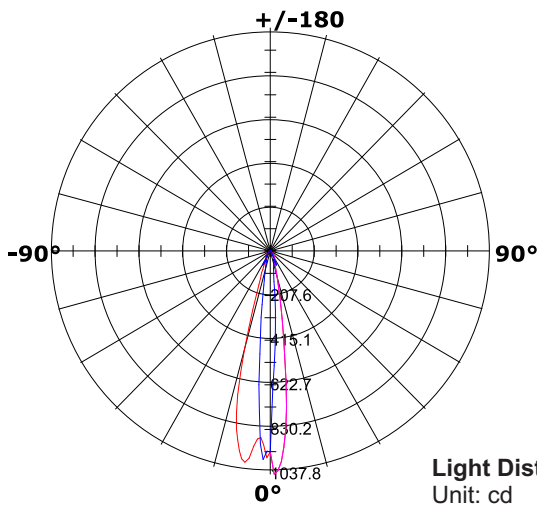

Light Distribution Curve
Unit: cd

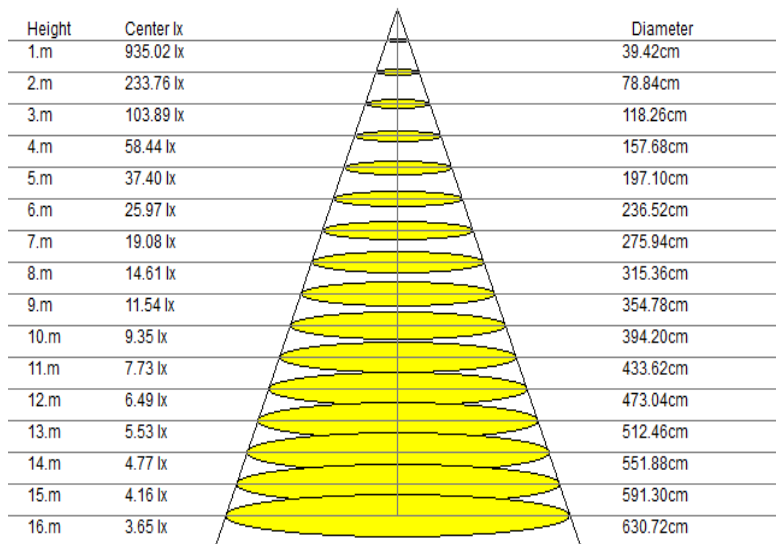

Lux Distance Curve
Beam angle: 22.30° (50% Imax)