

SPECIFICATION SHEET

SUBJECT

SLIM LED WALL PACK

CUSTOMER PROJECT

Project: _____

Type: _____

Cat. No.: _____

Qty: _____

Date: _____

EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The SLWP LED Series integrates Super-bright LED Technology while taking advantage of a stylish low profile. Ideal for commercial applications with wall mounting such as factories, commercial buildings, entrances walkways and loading areas.



**SLWP SLIM
LED WALL PACK**

SPECIFICATION FEATURES

Construction

Die-cast aluminum housing with rubber gasket on back plate
Suitable for wet locations

Electrical

120-277 Volt and 347 Volt
Operating Temperature -40°C to 40°C

Driver and Module Access

Modules located under the glass and driver located under the module plate

Mounting

Surface Mount

Finish

Bronze

Shielding


Tempered, impact-resistant, clear glass lens

Compliance

cETLus & DLC

Warranty

5 year / LM70 Life 200,000 Hours

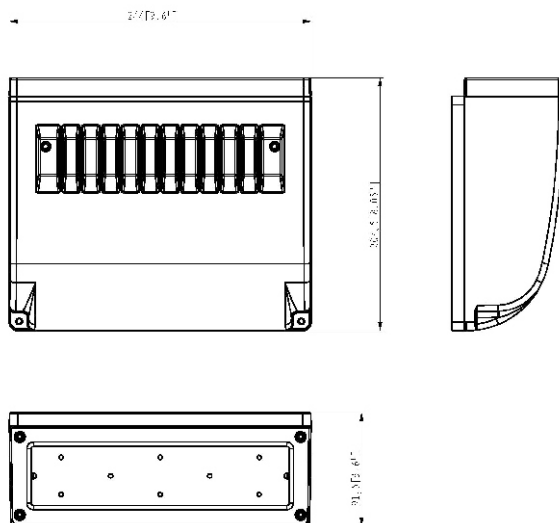

SLWP-35LED / SLWP-25LED









Dimensions

mm | 244(L) x 205(W) x 92(D)
inch | 9.6(L) x 8.1(W) x 3.6(D)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
	SLWP-35LED-50K	3307	35	120-277 or 347	5000K	93		Standard
	SLWP-35LED-40K	3186	35	120-277 or 347	4000K	90		Special Order
	SLWP-25LED-50K	2631	25	120-277 or 347	5000K	105		Standard Special Order for 347V
	SLWP-25LED-40K	2546	25	120-277 or 347	4000K	102		Special Order

NOTE:

- Lumens are estimated
- DLC qualified may not apply to all versions within a model. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

SHIPPING DATA

Model No.

SLWP-35LED
SLWP-25LED

Gross Weight

2.9 kg / 6.4 lbs
2.5 kg / 5.5 lbs

