

ELX-503

LED Exit Sign

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This fixture is an excellent choice when fast installation and an attractive appearance are priorities. Its long-lasting LEDs consume less than two watts of energy and are rated for a life of up to 25 years.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Every fixture includes a canopy, extra faceplate, and replaceable chevron directional indicator knockouts for control of direction.
- Components shaped by precision injection molding and has ½" knockouts for the supply of power.

FACE

- 6" high text with color diffusion
- Knockout directional chevrons
- Single or dual construction. Lettered face is available for applications where dual face is chosen.

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided.

ELECTRICAL


- 120V or 277V input
- Consumes only 2 watts of power
- LED lighting
- Safeguard against short circuits, power surges, and brown-outs

LIFE SPAN

- LED and PC circuits have a rating of about 25 years without a drop in illumination

LISTED

- UL 924, NFPA, NEC, State & Municipal
- Damp location approved

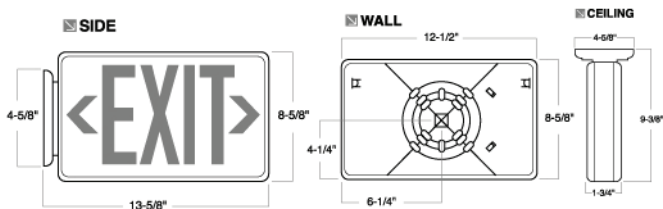

ELX-503 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	FACES	CANOPY
☐ G - Green	☐ W - White	(2) OPTIONAL BLANK FACE INCLUDED	UNIVERSAL MOUNT TO WALL OR CEILING
☐ R - Red	☐ B - Black		

Specified:

ELX-503

LETTER COLOR

HOUSING COLOR



California Title 20 Compliant

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011