

ELX-608

LED Edge-Lit Dual Circuit Exit Sign

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

FEATURES

This fixture is intended for use in applications where performance and appearance are high priorities. The product uses long-life LEDs, which consume very little energy - less than 3 watts - and it has a rated life of up to 25 years with no drop in illumination.

BODY

- This fixture is made from injection-molded acrylic panels that are supported by a small extruded aluminum frame.
- Aluminum and acrylic panel compartments.
- 2-Piece flexible aluminum that contains the PC board, battery, LED source, and the upper end of the acrylic face.

FACE

- Single- and double-faced exit lights are available.
- An appealing exterior is the result of the precisely designed edges of the acrylic face.
- 6" letters in red or green colors are within the cover. Adhesive chevrons are also provided.

MOUNTING


- Unique universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided

ELECTRICAL

- Universal 120V or 277V Dual Input
- Normally 3 Watts, 5 Watts in Emergency Use
- Light source - Led Strips
- Dual Circuit

LISTED

- UL 924, NFPA, NEC, State & Municipal
- Damp location approved

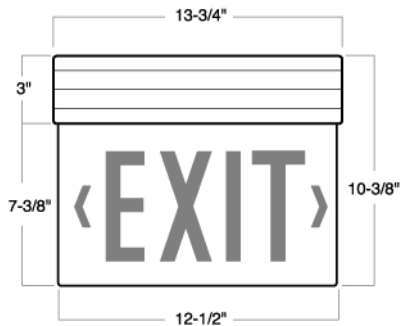

ELX-608 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	NUMBER OF FACES	PANEL COLOR
☐ G - Green	☐ AL - Natural Aluminum	☐ 1 - FACE	☐ CLEAR ACRYLIC
☐ R - Red	☐ W - White	☐ 2 - FACE	☐ MIRROR
	☐ B - Black		

Specified:

ELX-608

LETTER COLOR

HOUSING COLOR

NO. OF FACE

PANEL COLOR



California Title 20 Compliant

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011