

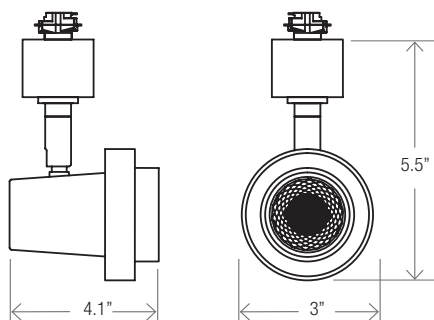


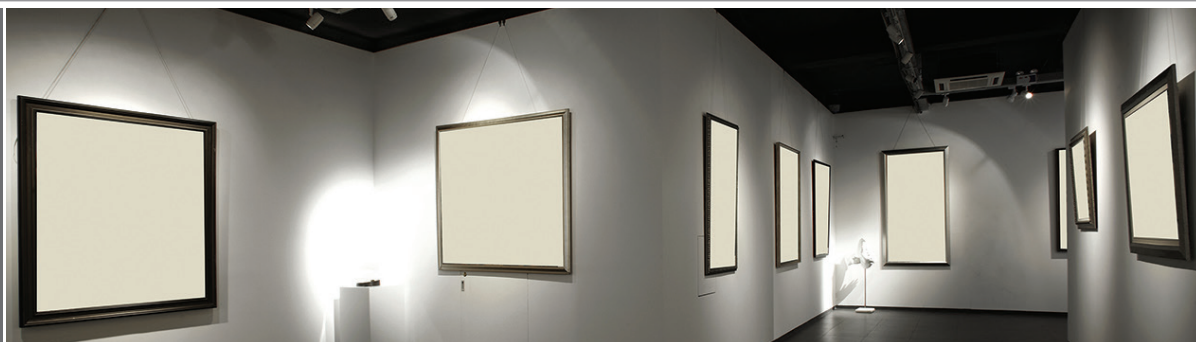

FEATURES

A small profile LED track light that delivers optimal lumen output, with precise aiming for accent, task, or general illumination, integrating into any design. Track heads are adjustable up to 360 degrees horizontally, 180 degrees vertically, and are compatible with 1-circuit and 2-circuit track. With the use of a friction-based locking movement system, the head can be adjusted and re-adjusted to a precise position, delivering light where needed. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones, and is the perfect complement for retail merchandising, galleries, museums, supermarkets, hospitality, and commercial.

OPTICS

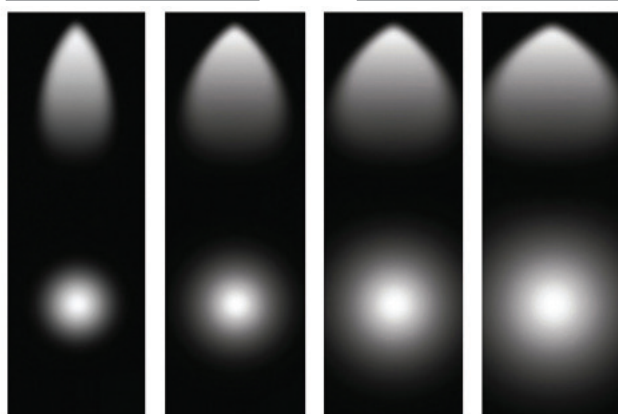

SP Spot 15°	NFL Narrow Flood 24°, 25°	FL Flood 36°, 38°	WFL Wide Flood 60°
--------------------------	--	--------------------------------	---------------------------------

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000	936	12.2 W

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

LUMENS	1000
CCT	30K, 40K
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTION	SP (Spot), NFL (Narrow Flood), FL (Flood), WFL (Wide Flood)
AIMING	360 degrees horizontally, 180 degrees vertically
FINISH	AWH (Architectural White) ABK (Architectural Black) Custom RAL
DIMMING	Flicker Free 10% Dimming TRIAC forward-phase or leading-edge 120V.
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options.

CONSTRUCTION

All track heads are designed using a proprietary coolLED Advanced Thermodynamic Design. The track head body is constructed of extruded aluminum, with a die-cast custom designed concealed heat sink, providing a thermal management system that is engineered for extremely long life and service period.

FINISH

Post-painted available in white, black and custom RAL colors.

ACCESSORIES

Track heads may accommodate 1 to 3 accessories. Please consult factory for standard or custom options.

TRACK COMPATIBILITY

Track heads are standard, with the compatibility for use with Mono-point, 1-Circuit, and 2-Circuit type H track. Please consult factory for 2-Circuit, 2-Neutral 120V Track, 2-Circuit, 2-Neutral 277V Track, 3-Circuit 1-Neutral, and Dali System Track.

DIMMING AND DRIVER INFORMATION

DIMTR – Electronic constant current LED driver compatible with TRIAC forward-phase or leading-edge dimming. Available in 120V. Dimmable down to 1%, standard. The LED driver is rated for 50 to 60Hz at 120V input, produces less than 20%THD, and has a power factor between 90% and 100%, and is thermally protected for additional safety.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

Example: **ET-LED-334-1000L-DIMTR-120-FL-30K-90-AWH**

SERIES	LUMENS	DIMMING	OPTICS	CCT/CRI	COLOR
ET-LED-334	 1000L - 1000 lumens	 DIMTR-120	 SP - Spot 15°  NFL - Narrow Flood 24°-25°  FL - Flood 36°-38°  WFL - Wide Flood 60°	 30K-90  40K-90	 AWH - Architectural White  ABK - Architectural Black

ET-LED-334-1000L-DIMTR-120-FL-30K-90-AWH

TEST NO.: **EL1018112**

INPUT WATTS: **12.2**

LUMENS: **936**


CRI: **90**

EFFICACY: **77**

CCT: **3000K**

SPACING CRITERIA: **0.68**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	486.94	52.70	52.00
0-30	756.40	81.80	80.90
0-40	861.07	93.10	92.00
0-60	915.69	99.10	97.90
0-80	932.68	100.90	99.70
0-90	935.54	101.20	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	7798	9645	18756
55	4816	5286	5553
65	4795	4779	5433
75	5561	5832	5527
85	4600	7038	6762

Lumens Per Zone

Zone	Lumens
0-10	147.70
10-20	339.24
20-30	269.46
30-40	104.67
40-50	40.27
50-60	14.35
60-70	9.95
70-80	7.05
80-90	2.86

Candela Tabulation

0	
0	1637.45
5	1576.76
15	1223.91
25	532.59
35	110.04
45	25.17
55	12.61
65	9.25
75	6.57
85	1.83
90	0.05

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
0	120	120	120	120	120	118	118	118	118	112	112	112	108	108	108	108	103	103	103	99	99	99	95	95
1	115	112	110	108	108	113	110	108	108	106	106	104	103	102	101	100	99	98	98	94	92	91	89	89
2	110	105	101	98	98	108	103	100	97	100	97	95	93	92	91	90	87	85	84	81	78	75	72	71
3	105	99	94	90	90	103	97	93	89	95	91	88	84	82	81	80	77	75	72	69	65	62	61	60
4	100	93	88	84	84	98	92	87	83	90	85	82	77	75	74	73	70	68	65	62	59	57	56	55
5	96	88	82	78	78	94	87	82	78	85	81	77	73	70	69	68	65	62	59	57	55	54	53	52
6	91	83	78	74	74	90	82	77	73	81	76	73	69	66	65	64	61	58	56	54	52	51	50	49
7	88	79	73	69	69	86	78	73	69	77	72	69	65	62	61	60	57	54	52	50	48	47	46	45
8	84	75	70	66	66	83	75	69	66	74	69	65	62	59	58	57	54	51	49	47	45	44	43	42
9	81	72	66	63	63	80	71	66	62	70	66	62	59	56	55	54	51	48	46	44	42	41	40	39
10	77	68	63	60	60	76	68	63	59	67	63	59	56	53	52	51	48	45	43	41	39	38	37	36

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance