


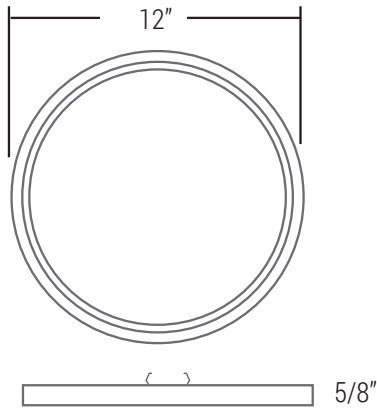

FEATURES

The RL1191 Slim Surface Mount is a round surface mount fixture with a 5/8" profile, suitable for shallow plenum applications. Easy, simple installation; installs over most standard 4" junction boxes and sits flush in the ceiling. Up to 900 lumens; Wet Location rated; IC/Non-IC installation. Identical performance and look of traditional downlights. Fire-rated when installed on a UL 514A-listed fire-rated j-box. The RL1191 provides comfortable general illumination perfect for corridors, pantries, closets, hallways, stairways, attics, basements, storage areas, covered outdoor areas, showers, and other residential and commercial environments.

LUMENS	1500
CCT	27K, 30K, 40K, 50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
DIMMING	DIMTR (Triac Dimming), DIM10 (0-10V Dimming)
FINISH	WH (White), BK (Black), SN (Satin Nickel), BZ (Bronze)
LIFETIME	50,000 Hours

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1500	1499	21W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.



OPTICAL PERFORMANCE

Beveled trim reduces glare and softens illumination while providing a sleek, modern design. Scratch-resistant frosted lens delivers diffused, pleasant lighting. 1.18 spacing criteria means that less fixtures are needed to achieve even illumination that fills the whole room.

HOUSING

Non-conductive polycarbonate housing suitable for shower and indoor or outdoor wet location application. White finish (paintable) standard.

TRIM RING COLOR OPTIONS

Designer color trim rings available in black, satin nickel, and bronze to match any design scheme. Color trim rings snap into place and can be easily swapped out in the field.

HARDWARE

Mounting plate, 2 screws, and 3 wire nuts shipped standard with fixture.

MOUNTING - QUICK, EASY INSTALL

- Can be installed into limited or no plenum space, including drywall; no existing recessed housing required.
- Driverless, time-saving install: Mounts directly over most standard j-boxes.

JUNCTION BOX MOUNTING

- For use with most 3-1/2" and 4" square, octagon, and round electrical junction boxes.
- IC rated for direct contact with insulation.
- Fire-rated when installed into UL514A-listed fire-rated j-box (provided by others).

RETROFIT INSTALLATION

E26 adapter and quick connectors provide ease of retrofit installation.

1. Insert wires into quick connectors. Make your connections.
2. Turn E26 lamp holder into socket base.
3. Using quick connectors, tuck all wires into recessed can.
4. Squeeze torsion springs and push fixture up into recessed can.

INTEGRAL EMERGENCY BATTERY AVAILABLE

- 90-min built-in emergency battery.
- Eliminates need for separate emergency fixtures required to meet electrical codes.
- Backplate accessory available without battery - to match raised look of emergency battery.

ACCESSORIES

Torsion springs for retrofit installation into recessed cans.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120V input. Produce less than 20% THD and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIMTR – Flicker-Free 5% Triac Dimming Standard (DIMTR) on 120V. Minimum 90° supply conductors.

WARRANTY

Five-year warranty for parts and components (labor not included).


LISTINGS

cETLus
Energy Star
Title 24, JA8
IC Rated
Wet Location
Quick Ship

EXAMPLE: **RL1191-1500L-DIMTR-120-30K-90-WH**

TYPE	LUMEN	CCT	CRI	FINISH
RL1191	☐ 1500L-DIMTR-120 ☐ 1500L-DIM10-120 ☐ 1500L-DIM10-277	☐ 27K ☐ 30K ☐ 40K ☐ 50K	☐ 90+	☐ WH-White (standard) ☐ RL1191-RT-BK - Black Ring ☐ RL1191-RT-SN - Satin Nickel Ring ☐ RL1191-RT-BZ - Bronze Ring

MOUNTING



**Pancake J-Box
(Metal)**



**3.5" Round
(Plastic)**



**4" Square
(Plastic)**



**4" Octagonal
(Metal)**



**4" Square
(Metal)**



**Fire Rated
J-Box**

Note: A 2-1/8" deep octagon junction box is recommended for through circuit wiring applications.

RING COLORS



RL1191-RT-BK
Black



RL1191-RT-SN
Satin Nickel



RL1191-RT-BZ
Bronze