



**IMPORTANT**

Read all breaking strength, safety and technical data relating to this product. Pages V-41 to V-45.

**Light Duty, Single Eye, Closed Mesh, Single Weave**


For permanent support when cable end is available to be installed.



| Cable Diameter Range<br>Inches (cm) | Approx. Breaking Strength Lbs. (N) |                 | E<br>Inches (cm) | M<br>Inches (cm) | Tin-Coated<br>Bronze | Stainless Steel |
|-------------------------------------|------------------------------------|-----------------|------------------|------------------|----------------------|-----------------|
|                                     | Tin-Coated Bronze                  | Stainless Steel |                  |                  |                      |                 |
| .23"-.31" (.58-.79)                 | 290 (1,290)                        | 700 (3,114)     | 3" (7.62)        | 3.75" (9.52)     | <b>02216001</b>      | <b>02416001</b> |
| .29"-.37" (.74-.94)                 | 290 (1,290)                        | 700 (3,114)     | 5" (12.70)       | 4.25" (10.79)    | <b>02216002</b>      | <b>02416002</b> |
| .35"-.44" (.89-1.12)                | 500 (2,224)                        | 850 (3,781)     | 5.5" (13.97)     | 4.75" (12.06)    | <b>02216003</b>      | <b>02416003</b> |
| .41"-.50" (1.04-1.27)               | 500 (2,224)                        | 850 (3,781)     | 5.5" (13.97)     | 5" (12.70)       | <b>02216004</b>      | <b>02416004</b> |
| .46"-.56" (1.17-1.42)               | 660 (2,936)                        | 850 (3,781)     | 6" (15.24)       | 5.25" (13.33)    | <b>02216005</b>      | <b>02416005</b> |
| .52"-.62" (1.32-1.57)               | 790 (3,514)                        | 1,050 (4,670)   | 7" (17.78)       | 6.25" (15.87)    | <b>02216006</b>      | <b>02416006</b> |
| .58"-.68" (1.47-1.73)               | 790 (3,514)                        | 1,050 (4,670)   | 7" (17.78)       | 6" (15.24)       | <b>02216007</b>      | <b>02416007</b> |
| .64"-.75" (1.63-1.90)               | 790 (3,514)                        | 1,050 (4,670)   | 7" (17.78)       | 6.75" (17.14)    | <b>02216008</b>      | <b>02416008</b> |
| .70"-.81" (1.78-2.06)               | 790 (3,514)                        | 2,050 (9,119)   | 7" (17.78)       | 7.25" (18.41)    | <b>02216009</b>      | <b>02416009</b> |
| .75"-.87" (1.90-2.21)               | 1,020 (4,537)                      | 2,050 (9,119)   | 8" (20.32)       | 8" (20.32)       | <b>02216010</b>      | <b>02416010</b> |
| .81"-.94" (2.06-2.39)               | 1,020 (4,537)                      | 2,050 (9,119)   | 8" (20.32)       | 8.25" (20.95)    | <b>02216011</b>      | <b>02416011</b> |
| .87"-.1.00" (2.21-2.54)             | 1,020 (4,537)                      | —               | 8" (20.32)       | 8.75" (22.22)    | <b>02216012</b>      | —               |
| .94"-.1.06" (2.39-2.69)             | 1,020 (4,537)                      | 2,050 (9,119)   | 9" (22.86)       | 9" (22.86)       | <b>02216013</b>      | <b>02416013</b> |
| 1.00"-1.18" (2.54-3.00)             | 1,020 (4,537)                      | 2,050 (9,119)   | 9" (22.86)       | 9.5" (24.13)     | <b>02216014</b>      | <b>02416014</b> |
| 1.06"-1.25" (2.69-3.17)             | 1,020 (4,537)                      | 2,050 (9,119)   | 9" (22.86)       | 9.5" (24.13)     | <b>02216015</b>      | <b>02416015</b> |

**Heavy Duty, Single Eye, Closed Mesh, Multi-Weave**

For permanent support when cable end is available to be installed.

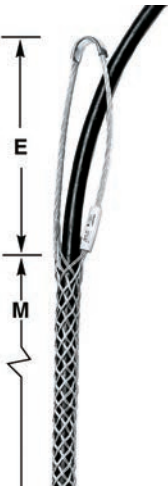

| Cable Diameter Range<br>Inches (cm) | Approx. Breaking Strength Lbs. (N) |                 | E<br>Inches (cm) | M<br>Inches (cm) | Tin-Coated<br>Bronze | Stainless Steel |
|-------------------------------------|------------------------------------|-----------------|------------------|------------------|----------------------|-----------------|
|                                     | Tin-Coated Bronze                  | Stainless Steel |                  |                  |                      |                 |
| .23"-.31" (.58-.79)                 | 500 (2,224)                        | 1,400 (6,228)   | 5" (12.70)       | 4.5" (11.43)     | <b>02217001</b>      | <b>02417001</b> |
| .29"-.37" (.74-.94)                 | 500 (2,224)                        | 1,150 (5,115)   | 5" (12.70)       | 5.5" (13.97)     | <b>02217002</b>      | <b>02417002</b> |
| .35"-.44" (.89-1.12)                | 870 (3,870)                        | 1,700 (7,562)   | 6" (15.24)       | 6.5" (16.51)     | <b>02217003</b>      | <b>02417003</b> |
| .41"-.50" (1.04-1.27)               | 870 (3,870)                        | 1,700 (7,562)   | 6" (15.24)       | 7.5" (19.05)     | <b>02217004</b>      | <b>02417004</b> |
| .46"-.56" (1.17-1.42)               | 1,050 (4,670)                      | 2,100 (9,341)   | 6" (15.24)       | 8" (20.32)       | <b>02217005</b>      | <b>02417005</b> |
| .52"-.62" (1.32-1.57)               | 1,050 (4,670)                      | 2,100 (9,341)   | 7" (17.78)       | 8.5" (21.59)     | <b>02217006</b>      | <b>02417006</b> |
| .58"-.68" (1.47-1.73)               | 1,050 (4,670)                      | 2,100 (9,341)   | 7" (17.78)       | 9.5" (24.13)     | <b>02217007</b>      | <b>02417007</b> |
| .64"-.75" (1.63-1.90)               | 1,390 (6,183)                      | 4,161 (18,509)  | 7" (17.78)       | 9.5" (24.13)     | <b>02217008</b>      | <b>02417008</b> |
| .70"-.81" (1.78-2.06)               | 1,390 (6,183)                      | 4,100 (18,238)  | 8" (20.32)       | 10.5" (26.67)    | <b>02217009</b>      | <b>02417009</b> |
| .75"-.87" (1.90-2.21)               | 1,390 (6,183)                      | —               | 8" (20.32)       | 10.5" (26.67)    | <b>02217010</b>      | —               |
| .81"-.94" (2.06-2.39)               | 1,390 (6,183)                      | —               | 8" (20.32)       | 10.5" (26.67)    | <b>02217011</b>      | —               |
| .87"-.1.00" (2.21-2.54)             | 1,790 (7,962)                      | 5,350 (23,798)  | 8" (20.32)       | 11.5" (29.21)    | <b>02217012</b>      | <b>02417012</b> |
| .94"-.1.06" (2.39-2.69)             | 1,790 (7,962)                      | 5,300 (23,576)  | 9" (22.86)       | 12.5" (31.75)    | <b>02217013</b>      | <b>02417013</b> |
| 1.00"-1.18" (2.54-3.00)             | 1,790 (7,962)                      | 5,300 (23,576)  | 9" (22.86)       | 13.5" (34.29)    | <b>02217014</b>      | <b>02417014</b> |
| 1.06"-1.25" (2.69-3.17)             | 1,790 (7,962)                      | 5,350 (23,798)  | 9" (22.86)       | 14.5" (36.83)    | <b>02217015</b>      | <b>02417015</b> |

Note: E-Eye length. M-Mesh length at nominal diameter.

Screw Hook  
 Catalog Number **20303001**  
 Yield Strength 900 lbs (4003 N)

