

Midget Twist-Lock® Devices
 15A, 125V AC; 2 Pole, 3 Wire Grounding
 Valise® Connector

HUBBELL

Features

- Fully insulated, abuse resistant nylon housing
- Insulation displacement terminals reduce wiring time
- Insulation displacement terminal



Ordering Information

Description	Cord Diameter	UPC Number	Catalog Number
Black Valise® connector.	.300"-.430" (7.6-10.9)	783585237763	HBL7593V

Listings

Listed to UL 498
 Certified to CSA C22.2 No.42

Specifications

Housing	Nylon
Blades	Brass
Insulation Displacement Terminals	Brass
Body Holding Screws	Steel - Zinc plated

Performance

Electrical


Current Interrupting Certified for current interrupting at full rated current
 Dielectric Voltage Withstands 2,000V minimum

Mechanical

Terminal Accomodation #18 AWG - #14 AWG stranded copper wire only.
 Terminal Identification Terminals identified in accordance with UL 498

Environmental

Flammability HB or better per UL94/CSA 22.2 No.0.17
 Moisture Resistance IP20 Suitability
 Operating Temperatures Maximum Continuous 75°C Minimum -40°C (w/o impact)

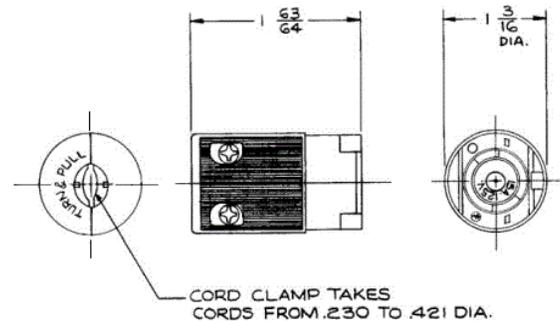

Accessories

Valise® Plug	HBL7594V
Nylon Flanged Inlet	HBL7595N
Stainless Steel Flanged Inlet	HBL7595
StainlessSteel Flanged Inlet with HBL7551	
Covered Terminals	

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

