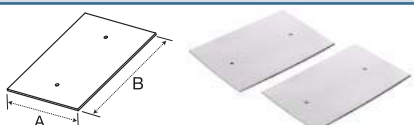

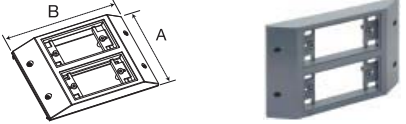







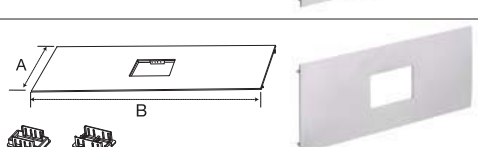


HBLALU5000 and HBLALU7620 Series

Fittings for HBLALU5000 and HBLALU7620 Aluminum Raceway		Catalog Numbers	Color
Couplings (Pair) To join lengths of cover or base.		HBLALU5701 A: 2.38" (60.30) B: 4.00" (101.80)	Anodized Aluminum
Grounding Adapter For connection of equipment grounding. #10-32 Locking screws included.		HBLALU5709 A: 3.37" (85.50) B: 2.00" (50.83)	Anodized Aluminum
Internal Corner Coupling For butting two raceway sections to form an internal 90° turn in a raceway run.		HBLALU5717A A: 3.50" (88.90) B: 2.38" (60.30)	Anodized Aluminum
2-Gang Raised Device Box KP device plates only, found on page 68.		HBLALU57KP2G A: 5.08" (129.10) B: 7.64" (193.90)	Gray PVC
Blank Cover To cover 12 in. (305.00) section of raceway.		HBLALU57BL A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Hubbell iSTATION™ Cover For mounting Hubbell iSTATION™ Modules. IMF1GY or IFPxxGY frames and plates on pages 68 and 69.		HBLALU57LPB A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Duplex Receptacle Cover For duplex receptacles and duplex communication plates. BM = Base Mount device.		HBLALU57DR HBLALU57DRBM* A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Single Receptacle Cover For single receptacle with face diameters of 1.38 in. to 1.39 in. (35.05 to 35.31). BM = Base Mount device.		HBLALU57E HBLALU57EBM* A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Single Receptacle Cover For single receptacle with face diameters of 1.56 in. to 1.59 in. (39.62 to 40.39). BM = Base Mount device.		HBLALU57F HBLALU57FBM* A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Rectangular Style Line® Cover For Style Line rectangular duplex receptacle, GFCI, surge device or rectangular communication device. BM = Base Mount device.		HBLALU57G HBLALU57GBM* A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Toggle Switch Cover For single pole, two pole, three way or four way switches. BM = Base Mount device.		HBLALU57N HBLALU57NBM* A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum
Ortronics® Cover Plate For two Ortronics TracJack® or one Series II® datacom insert. Both bezels included.		HBLALU57ABRT A: 2.54" (64.50) B: 12.00" (304.80)	Anodized Aluminum

Note: * See page 61 for Base Mount cover plate design details.

Ortronics®, Series II® and TracJack® are registered trademarks of The Ortronics Company.