



Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

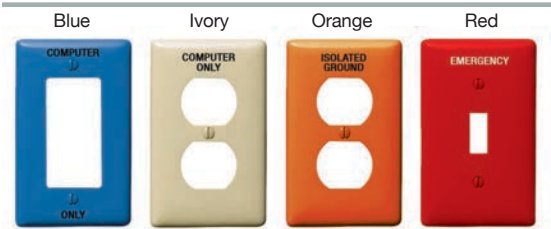
- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

Nylon Wallplates



Nylon Pre-Marked Wallplates



Metal Wallplates



Pre-Marked





Blank Wallplates, Box Mount and Strap Mount

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
	Almond	NP13AL	NPJ13AL	Aluminum	SA13A
	Black	NP13BK	NPJ13BK	Brass	SB13
	Brown	NP13	NPJ13	Brass Plated	SBP13
	Gray	NP13GY	NPJ13GY	Chrome	SCH13
	Ivory	NP13I	NPJ13I	S/S 302/304	SS13
	Light Almond	NP13LA	NPJ13LA	S/S 430	SS13L
	Office White	NP13OW	NPJ13OW	Steel, Almond	SP14BAL*
	White	NP13W	NPJ13W	Steel, Gray	SP14BG*
	Almond	NP23AL	NPJ23AL	Aluminum	SA23
	Black	NP23BK	—	Brass	SB23
	Brown	NP23	NPJ23	Brass Plated	①
	Gray	NP23GY	—	Chrome	SCH23
	Ivory	NP23I	NPJ23I	S/S 302/304	SS23
	Light Almond	NP23LA	NPJ23LA	S/S 430	SS23L
	White	NP23W	NPJ23W	Steel, Almond	SP24BAL*
				Steel, Gray	SP24BG*
	Brown	NP33	—	Aluminum	①
	Ivory	NP33I	—	Brass	①
	White	NP33W	—	Brass Plated	①
				Chrome	①
				S/S 302/304	SS33
				S/S 430	—
				Steel, Almond	SP34BAL*
	Brown	NP43	—	Aluminum	①
	Ivory	NP43I	—	Brass	①
	White	NP43W	—	Brass Plated	①
				Chrome	①
				S/S 302/304	SS43
				S/S 430	—
	Black	NP14BK	—	Aluminum	①
	Brown	NP14	—	Brass	SB14
	Gray	NP14GY	—	Brass Plated	①
	Ivory	NP14I	—	Chrome	①
	Office White	NP14OW	—	S/S 302/304	SS14
	Red	NP14R	—	S/S 430	SS14L
	White	NP14W	—	Steel, Almond	SP14AL*
				Steel, Gray	SP14G*
	Black	NP24BK	—	Aluminum	①
	Brown	NP24	—	Brass	①
	Gray	NP24GY	—	Brass Plated	①
	Ivory	NP24I	—	Chrome	①
	Office White	NP24OW	—	S/S 302/304	SS24
	Red	NP24R	—	S/S 430	SS24L
	White	NP24W	—	Steel, Almond	SP24AL*
				Steel, Gray	SP24G*
	Brown	NP34	—	Aluminum	①
	Ivory	NP34I	—	Brass	①
	White	NP34W	—	Brass Plated	①
				Chrome	①
				S/S 302/304	SS34
				S/S 430	—
				Steel, Almond	SP34AL*
	Brown	NP44	—	Aluminum	①
	Ivory	NP44I	—	Brass	①
	White	NP44W	—	Brass Plated	①
				Chrome	①
				S/S 302/304	SS44
				S/S 430	—

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

①Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

*Powder coat paint finish.



Specifications

Listings

Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.

Nylon Plate

Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.

302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass (70% Copper, 30% Zinc) Plate

Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.

Aluminum Plate

Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.

Chrome Plated Steel Plate




Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.

Steel Painted Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.

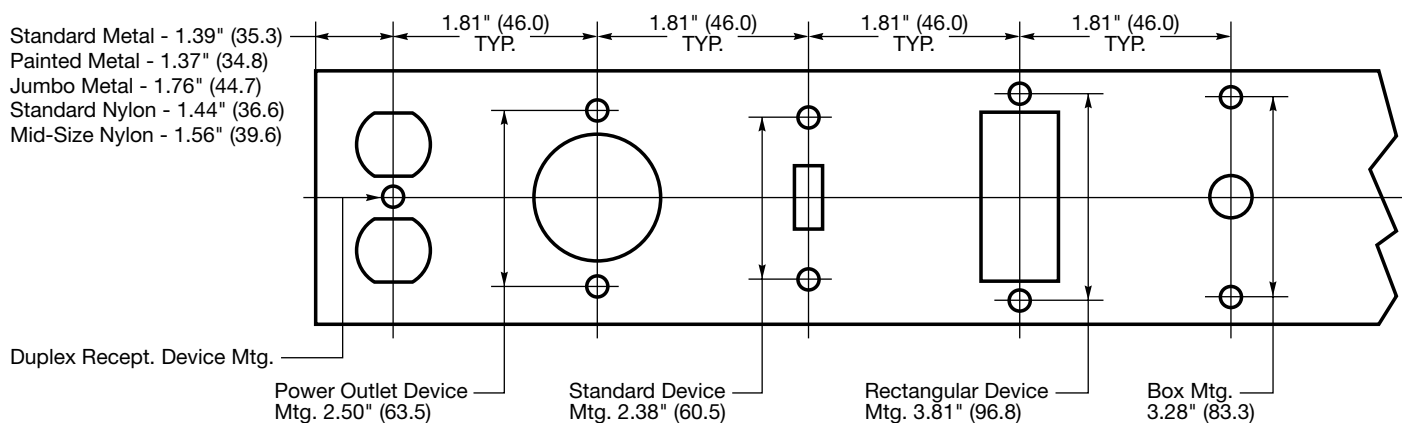


Product Dimensions

	Size	Standard Metal		Painted Metal	Size	Jumbo Metal	
		Height	Width	Width		Height	Width
	1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
	2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
	3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)			
	4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)			
	5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)			
	6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)			
	7-Gang	4.50" (114.3)	13.68" (347.5)				
	8-Gang	4.50" (114.3)	15.44" (392.1)				
	Size	Standard Nylon			Size	Mid-Size Nylon	
		Height	Width			Height	Width
	1-Gang	4.63" (117.6)	2.88" (73.2)		1-Gang	4.88" (124.0)	3.13" (79.5)
	2-Gang	4.63" (117.6)	4.69" (119.1)		2-Gang	4.88" (124.0)	4.94" (125.4)
	3-Gang	4.63" (117.6)	6.50" (165.1)		3-Gang	4.88" (124.0)	6.75" (171.5)
	4-Gang	4.63" (117.6)	8.31" (211.1)		4-Gang	4.88" (124.0)	8.56" (217.4)
	5-Gang	4.63" (117.6)	10.12" (256.1)				
	6-Gang	4.63" (117.6)	11.93" (303.0)				
	Size	Snap-On Nylon					
		Height	Width				
	1-Gang	4.68" (118.9)	2.94" (74.7)				
	2-Gang	4.68" (118.9)	4.75" (120.7)				
	3-Gang	4.68" (118.9)	6.56" (166.6)				
	4-Gang	4.68" (118.9)	8.37" (212.6)				
	5-Gang	4.68" (118.9)	10.18" (258.6)				
	6-Gang	4.68" (118.9)	11.99" (304.5)				

Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical



Note: Specifications are subject to change without notice.