



### Bright Light, Made to Last!



High CRI



Dimmable



## Product information

### FEATURES

- 4FT 40w 5200LM
- NEMA 4X / 250-2014 standard compliance
- High Lumen Efficacy 130LM/w
- DLC Premium, cETL listed
- LM-79 & LM-80 tested
- 0-10v dimmable
- 50,000 hour life
- IP66 rated
- Replaceable LED strip
- PC housing and frosted diffuse lens
- Stainless steel clips
- Silicone perimeter gasket
- Isolated LED driver
- Quick & easy installation and maintenance
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Parking Garage
- Stairwells
- Walkways
- Canopies
- Commercial/Industrial


### INSTALLATION

- Surface mount
- Pendant (optional)
- Suspended (optional)

### ADDITIONAL INFO

- Light gray housing
- Operating temperature -20°C ~+50°C
- Microwave sensor (optional)
- Emergency battery back up (optional)

### DIAGRAM

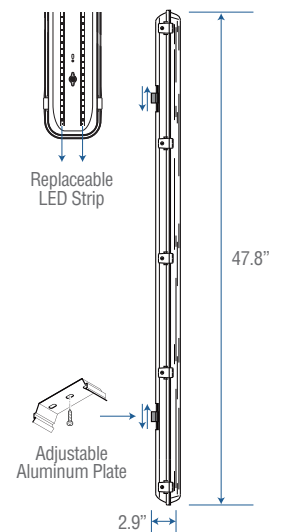

ORDER CODE	DLC MODEL	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	MOL (IN)	CASE QTY.
L2501-2230	ILX-SVFD-220-D(4000K)	PLKHND8CHJII	LED VAPOUR TIGHT 4FT 40W 4K DIM	40	120-277V	5200	4000K	50,000	120°	83+	60	47.8x3.2x2.9	8
L2501-2250	ILX-SVFD-220-D(5000K)	PL0UL2MR8SVG	LED VAPOUR TIGHT 4FT 40W 5K DIM	40	120-277V	5200	5000K	50,000	120°	83+	60	47.8x3.2x2.9	8

Also available: 2FT, 4FT, 5FT. 3000K, 5000K and 6500K. MOQ may required.