



Type IC, Wet & Air-Tight

DESCRIPTION

4" Eyeball Round Recessed Gimbal LED
With Integral Driver In Connection Box
Unique & Patented Design:
Gimbal Yet Air-Tight Without Housing Needed


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Fast & Easy To Install - Save On Labor
Driver Inside Connection Box - No Junction Box Needed
Directional Beam - Great for Sloped Ceilings and Artwork
CRI 90+ for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2 1/2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/2"

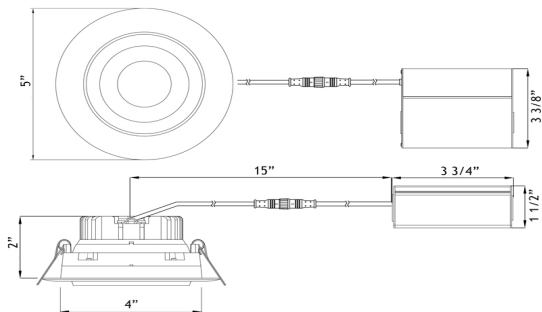

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD1025T

ORDERING GUIDE Example: LL4G - 30K - WH

| LL4G | CCT | Trim Finish | |
|-------------------------------|-----|--------------------------|----------------|
| 2700K | 27K | WH | White |
| 3000K | 30K | BK | Black |
| 4000K | 41K | BN | Brushed Nickel |
| Dim to Warm 3000K to 2000K | 32K | White Trim Only In Stock | |

Lotus LED Lights USA

www.LotusLEDLights.com

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

LL4G

4" Eyeball Round Recessed Gimbal LED 11.4W

Project:

Location:

Cat #:

Qty:

Notes:

| SPECIFICATION | |
|-----------------------|---|
| Applications | Sloped Ceilings, Highlighting Artwork |
| Energy Used | 11.4 W |
| Color Temperature | 2700 3000 4100 DTW 30-20 |
| Light Output | 960 1000 1050 800 |
| Halogen Equivalent | 50 W |
| Beam Angle | 38° wide beam with 20° tilt and 360° rotation |
| CRI | 90 + |
| Default Driver Input | 120V AC Triac Dimmable |
| Optional Driver Input | 120V-347V AC 0-10V Dimmable |
| Power Factor | 0.95 |
| Approved Location | Insulated Ceiling & Wet Locations |
| IP Rating | IP 54 |
| Air Tight | Yes |
| Ambient Temperature | -40°F (-40°C) to +104°F (+40°C) |
| Projected Life | 70% Light Output at 50,000 Hours |
| Certification | cULus, Energy Star (except DTW), T24 |
| Warranty | 10 Year on Residential 5 Year on Commercial Applications |

AVAILABLE TRIMS



White



Black



Brushed Nickel

ACCESSORIES

Sold Separately

Low Voltage Extension Cables
6ft - cat #EXC6, 20ft - cat #EXC20
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat #RIP4



Flanged Rough-In Plate - cat #FRP4



Goof Ring OD 5 3/4"
White cat #GR4 Black cat #GR4-BK

COMPLIANCE



Type IC
Air-Tight

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON