


NS-48 / NS-49

Adjustable Wall Wash with Baffle

TRIM DIMENSIONS



Trim OD: 5"
Height: 2-1/2"

FEATURES

Trim

Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare with half moon. Non-reflective painted finishes. Adjustable ring allows lamp to be mounted on top of the trim and adjustable up to 15°. Trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount directly onto adjustable ring.

Compatible Housings

Compatible with Line Voltage housings.

See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

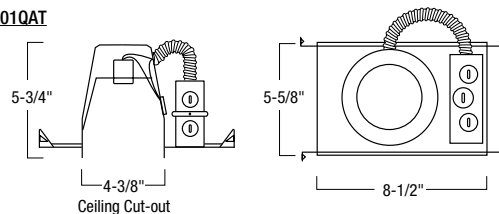

NSIC-401QAT

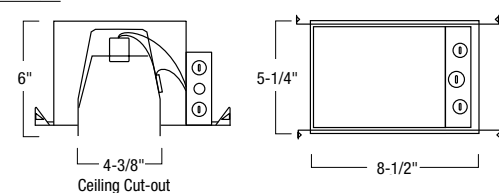

NSR-404QAT

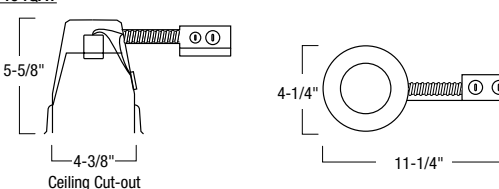

Adjustable Wall Wash with Baffle

NS-48: White Adjustable Wall Wash with White Baffle and White Ring

NS-48BZ: Bronze Adjustable Wall Wash with Bronze Baffle and Bronze Ring

NS-48CO: Copper Adjustable Wall Wash with Copper Baffle and Copper Ring

NS-48N: Natural Metal Adjustable Wall Wash with Natural Metal Baffle and Natural Metal Ring

NS-49: White Adjustable Wall Wash with Black Baffle and White Ring

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com