

2ALS-3CCT+W | 4ALS-3CCT+W | 8ALS-3CCT+W

HIGHLIGHTS

Illuminate spaces with variety of shapes using LED Architectural strip lights

- Power and CCT can be adjusted in three levels
- Provides lighting distribution options of 70% Downlight 30% Uplight, 90% Downlight 10% Uplight, 100% Downlight
- Extruded-aluminum housing is well suited for open-plan space design
- Smooth Dimming 0-10V dimming standard
- Available with suspended installation and suspended continuous row-mounting installation
- 5 years warranty










DIMENSIONS

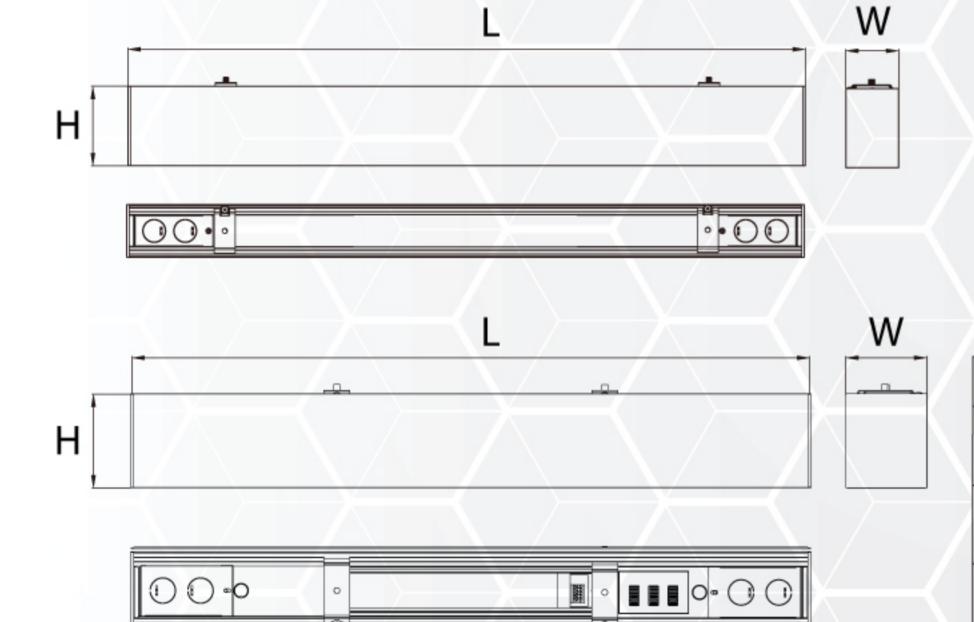

MODEL	LxWxH	
2ALS-3CCT+W	610x50x75(mm) / 25.02"x1.97"x2.95"	
4ALS-3CCT+W	1220x50x75(mm) / 48.03"x1.97"x2.95"	
8ALS-3CCT+W	2440x50x75(mm) / 96.06"x1.97"x2.95"	

SPECIFICATIONS

Model	2ALS-3CCT+W	4ALS-3CCT+W	8ALS-3CCT+W
Wattage	15W/20W/25W	30W/40W/50W	60W/80W/100W
Voltage		AC120-347V	
Lumens		130 LM/W	
Beam Angle		120°	
Lifetime Warranty		50000 hours 5 Years	
Power Factor		≥0.9	
Rating		IC rated Dry and damp location	
Grade of Protection		IP40	
CRI		≥80	
Colour Temp.		3500K / 4000K / 5000K	
Dimming	Yes(only 0-10v dimming available)		
Application	Office / Retail Store	es / Restaurants / Hotels / Building F	acades / Plazas, etc.
Operating Temp.		-20°C ~ +45°C	










2ALS-3CCT+W | 4ALS-3CCT+W | 8ALS-3CCT+W

FINISH OPTIONS





CCT & POWER OPTIONS


HOUSING: Aluminum OPTICS: PS lens

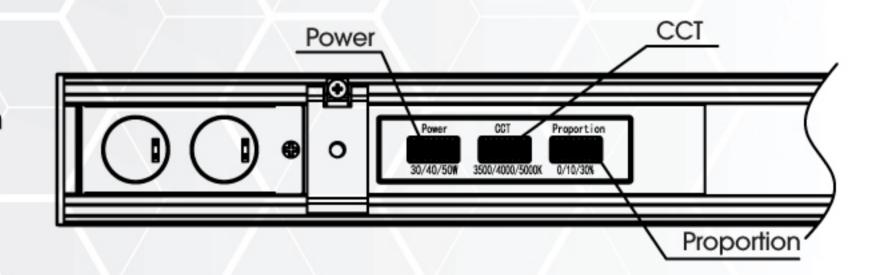


TESTING REPORT

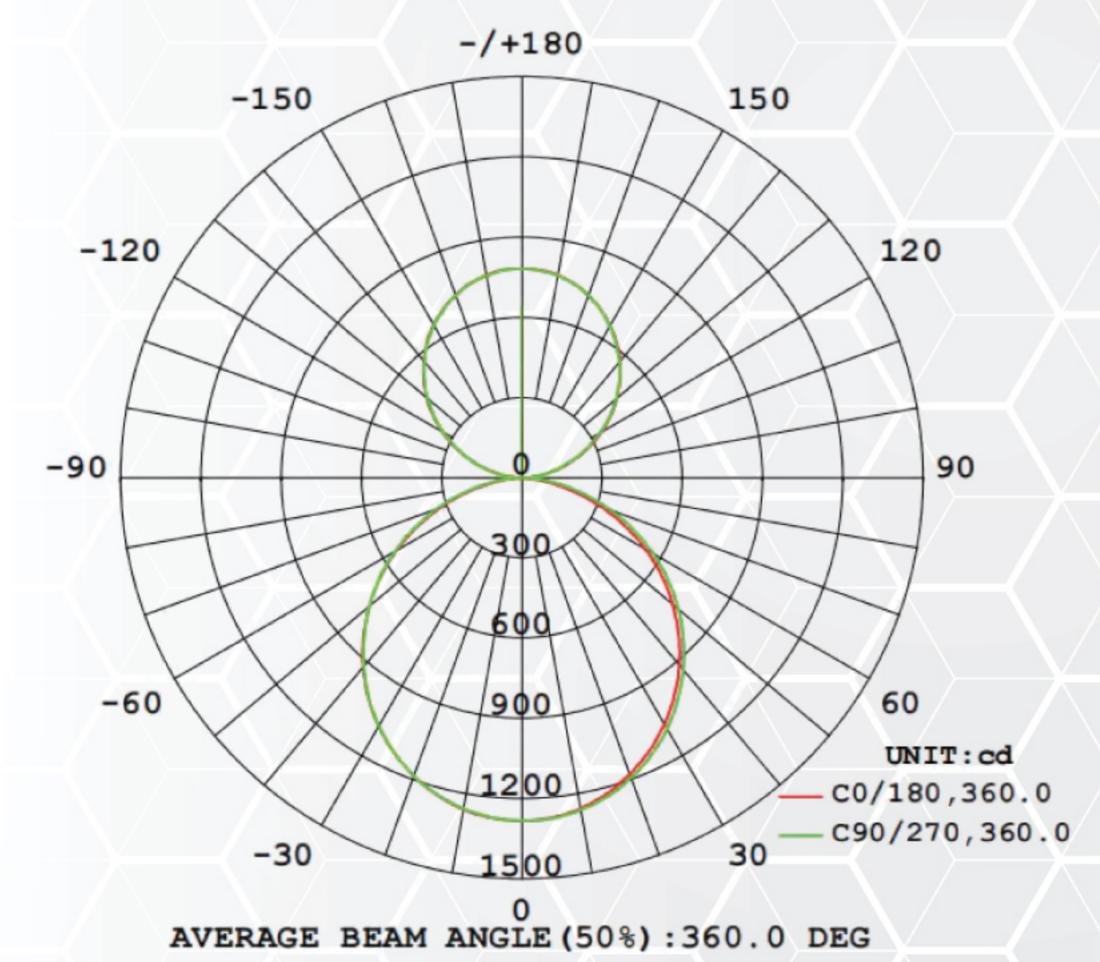

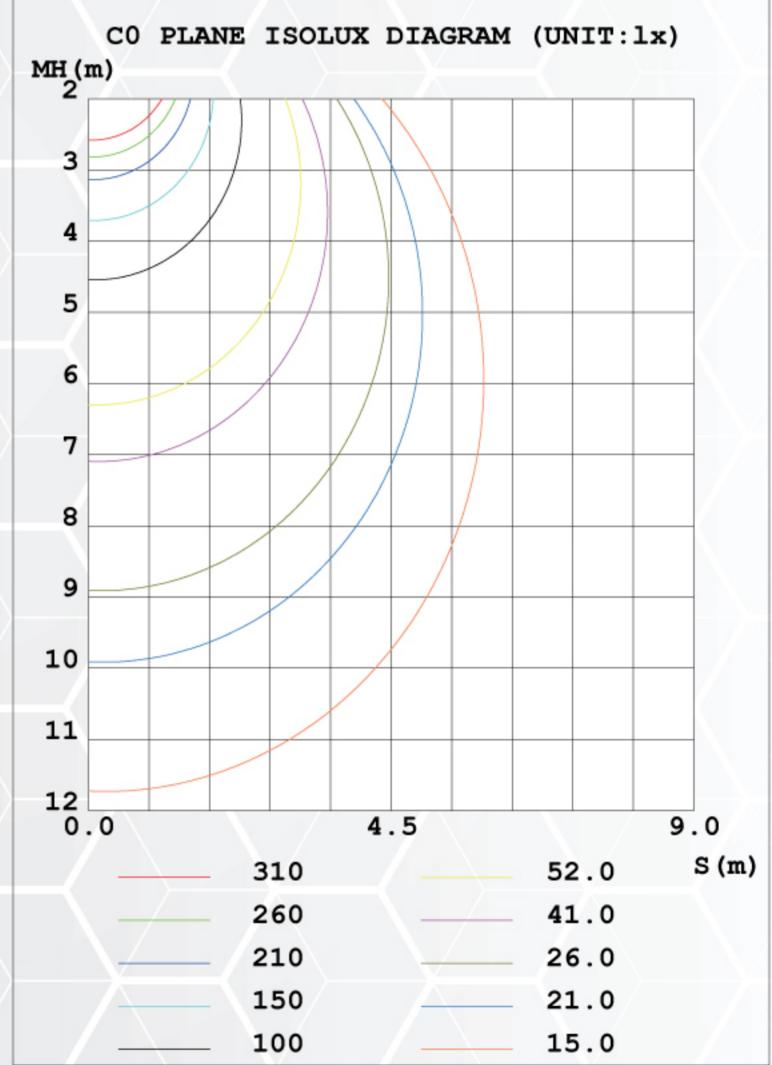













Recessed

Pendant (Down)

(Up&down)













2ALS-3CCT+W | 4ALS-3CCT+W | 8ALS-3CCT+W


ACCESSORIES (SOLD SEPARATELY)





2ALS-3CCT+W | 4ALS-3CCT+W | 8ALS-3CCT+W

ACCESSORIES (LINE DRAWINGS)

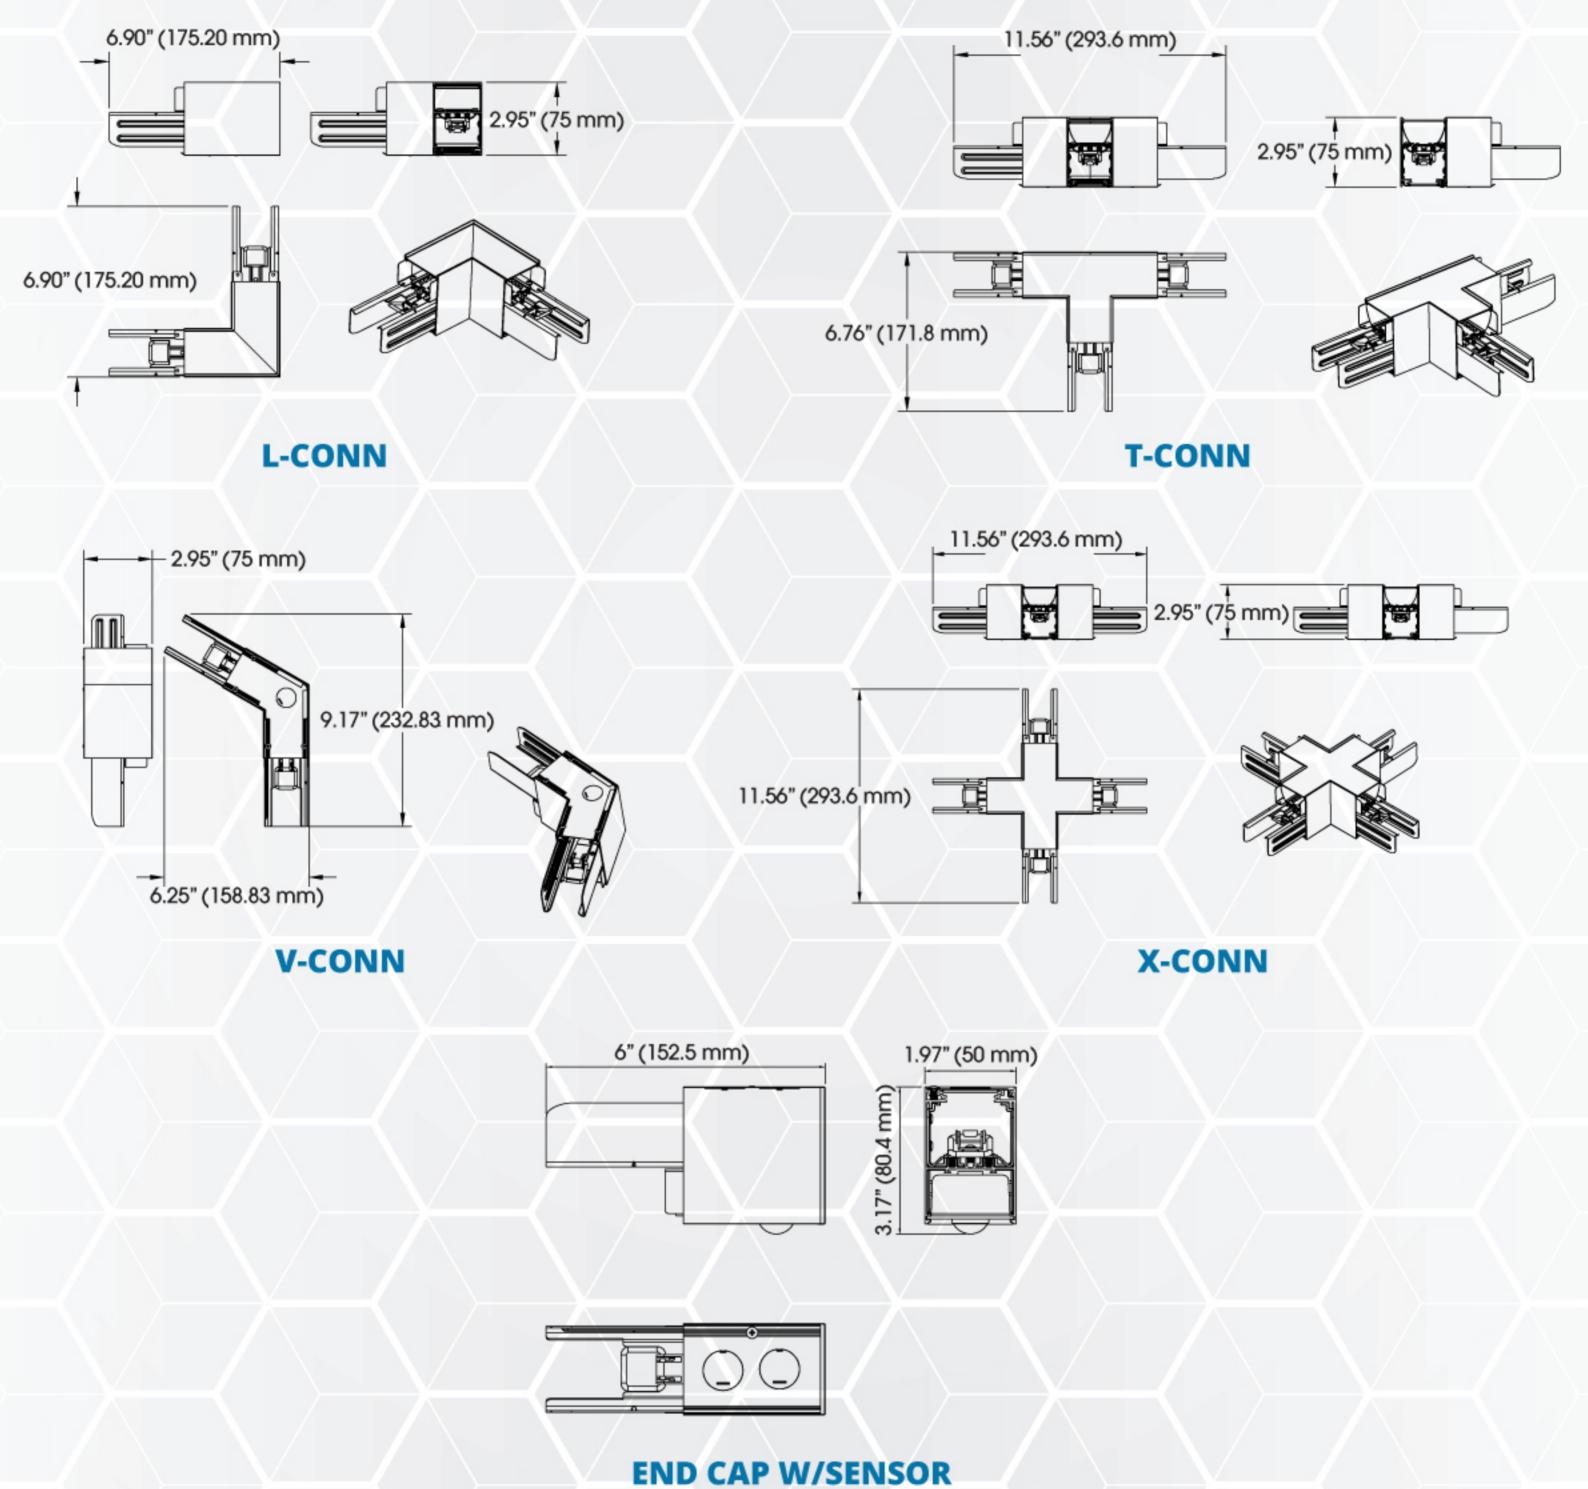

EN	D C	AP	W/	SEN	SO	R

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.









