

LED LINEAR STRIP LIGHTS


OL-ST4-3CCT+W

HIGHLIGHTS

48" LED Strip Light Power and CCT adjusted

- Daisy connection of up to 24 units per single power source running 347v
- Suspending installation and surface-mounted installation
- Diffused light, Damp location rated, Polycarbonate lens
- Motion sensor compatible (sold separately)
- 5 year warranty

DIMENSIONS

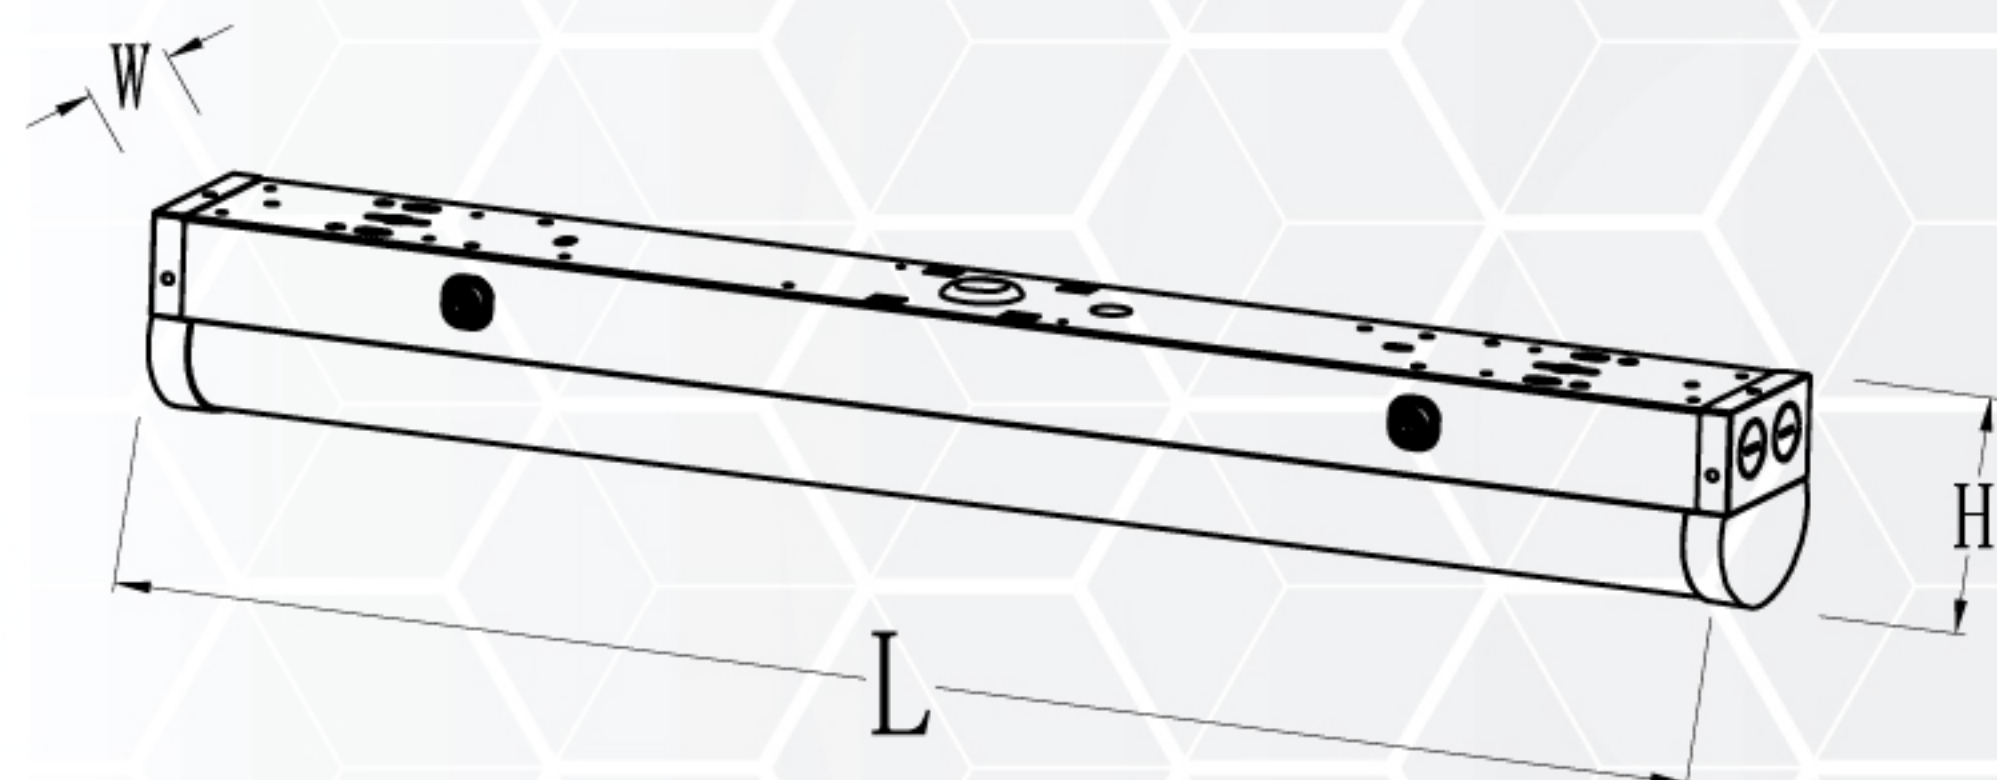

Model	L×W×H (mm/inch)
OL-ST4-3CCT+W	1220x75x83(mm) / 48.03"x2.95"x3.26"



SPECIFICATIONS

Model	OL-ST4-3CCT+W
Wattage	30W 40W 50W
Voltage	AC120-347V
Lumens	3900lm 5200lm 6500lm
Beam Angle CRI	120° 80
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Warranty	5 years
Grade of Protection	IP20
Luminous Efficiency	130LM/W
Colour Temp.	3500K / 4000K / 5000K
Application	School / Hospital / Super market / Office / Warehouse
Operating Temp.	-20°C ~ +40°C
Case Quantities	8

ACCESSORIES



OL-ST4-LINK-KIT



OL-ST4-SUS-KIT
(aircraft cable length: 4.92ft.)


DAISY CONNECTION

- 120V = 10 units
- 277V = 19 units
- 347V = 24 units


LED LINEAR STRIP LIGHTS

OL-ST4-3CCT+W

TESTING REPORT

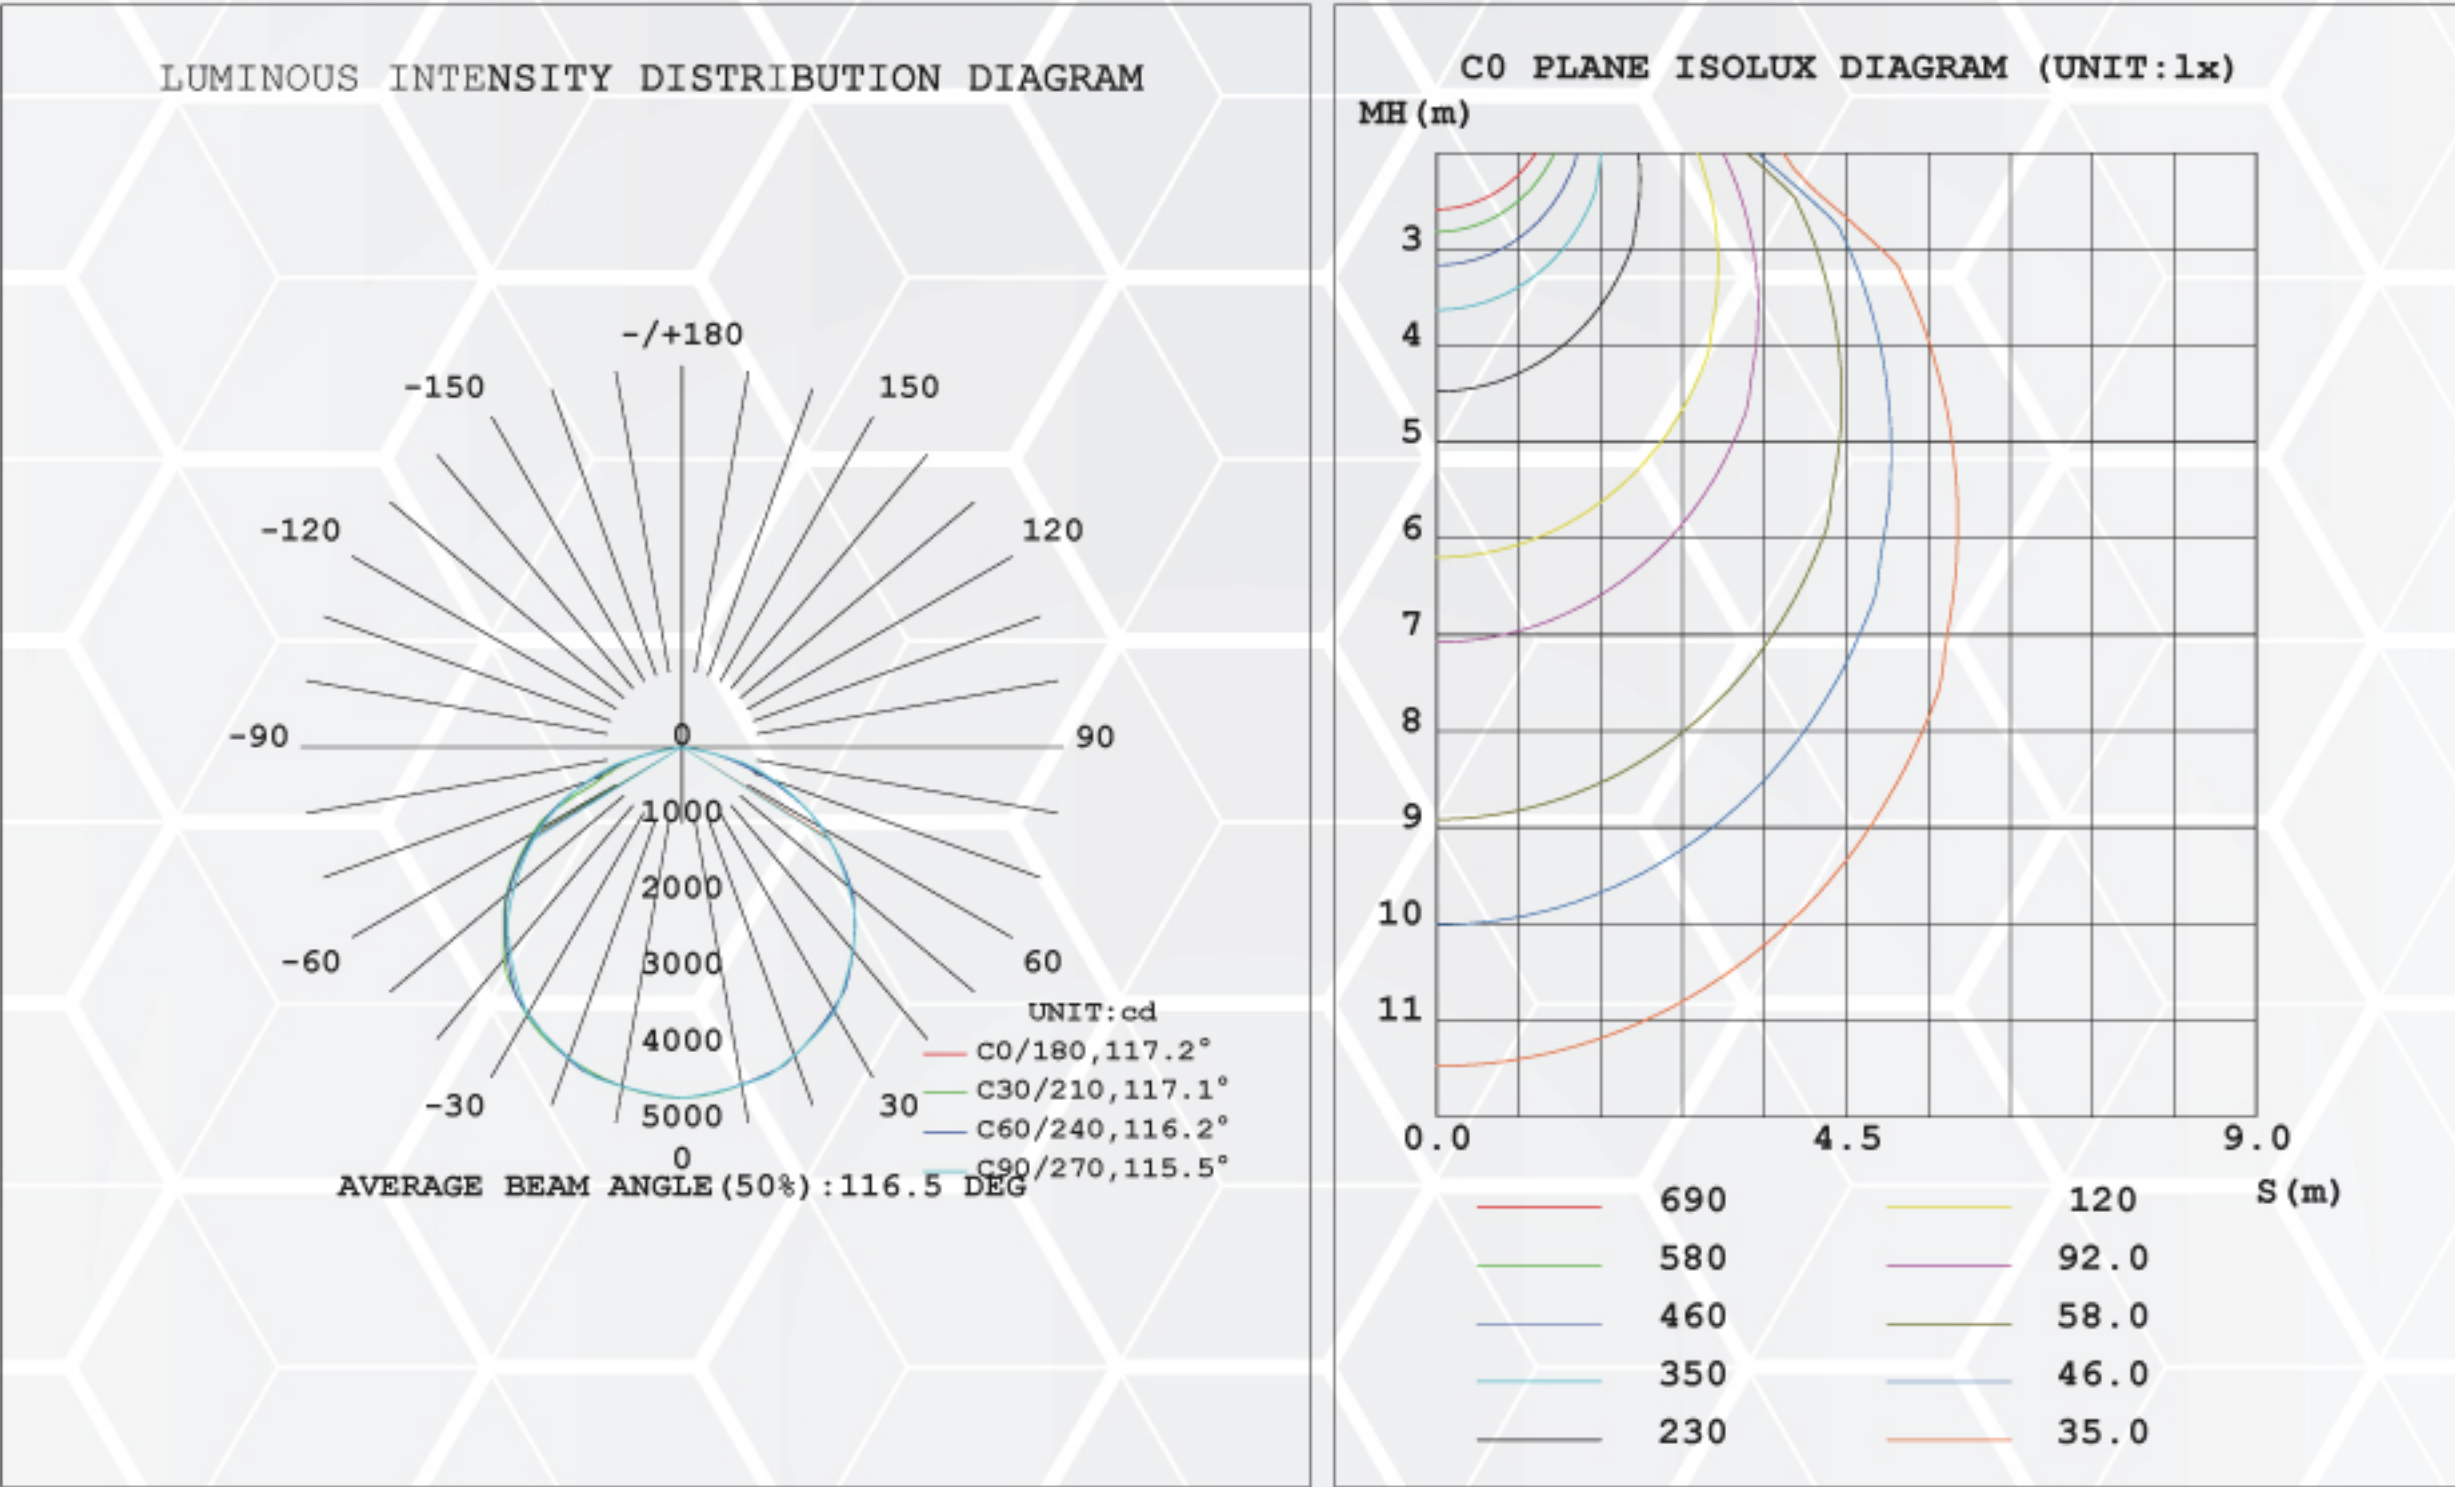

APPLICATIONS

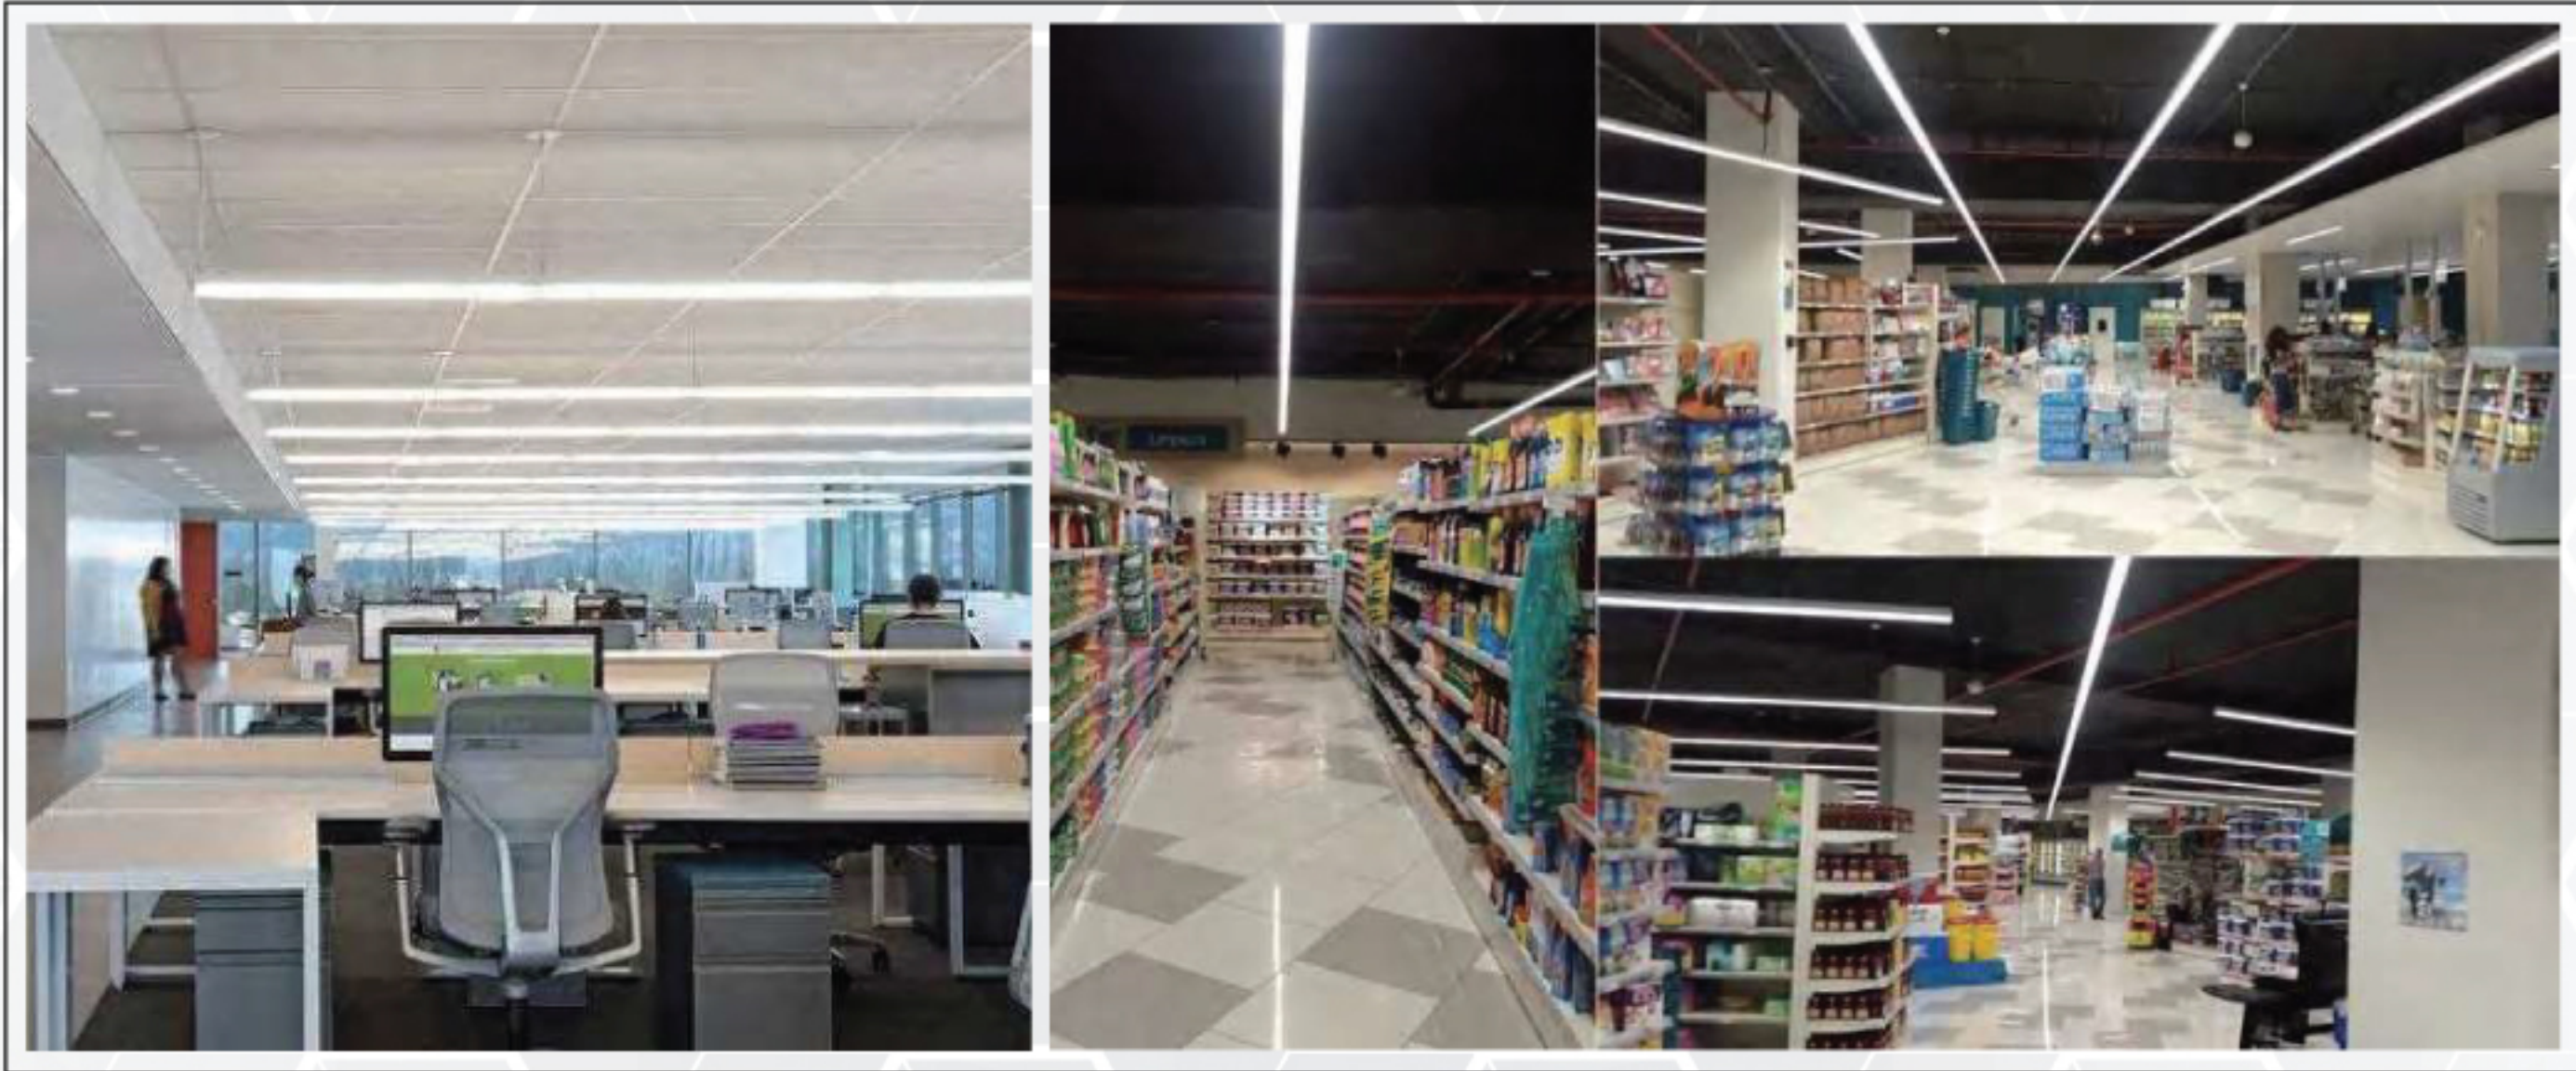

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.