

SAFETY INFORMATION

Released Date: 2023-09-07

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

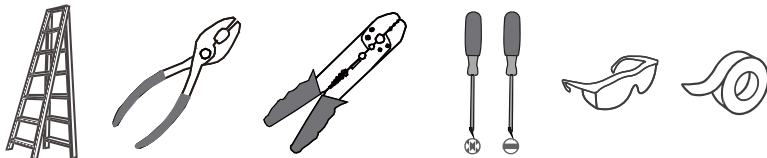


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

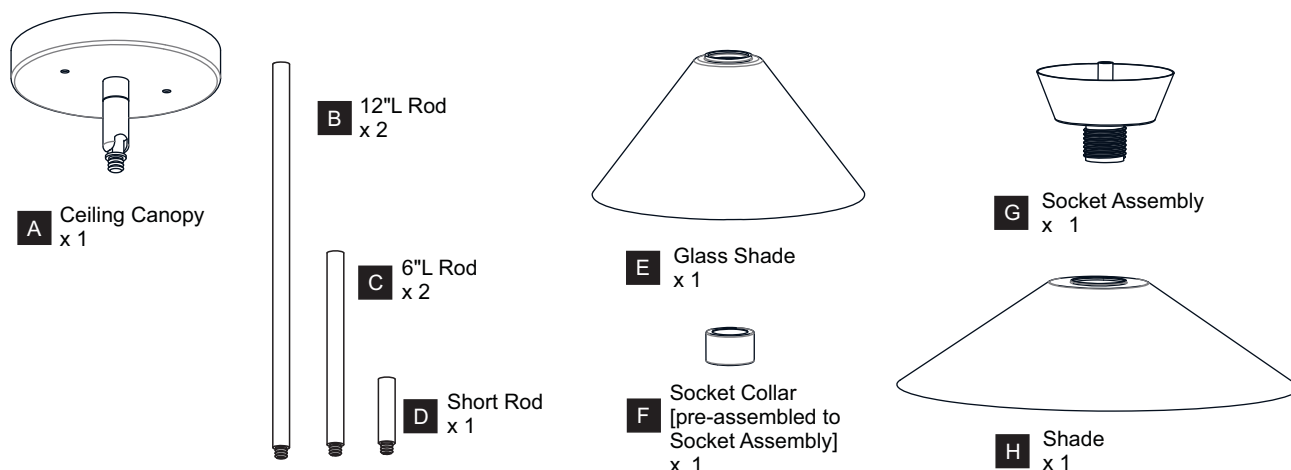

MOUNTING HARDWARE

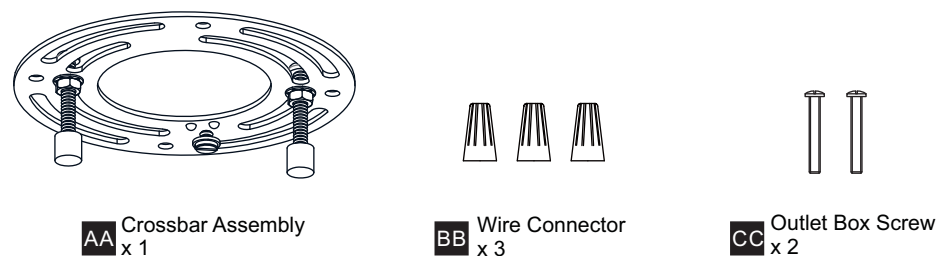


INSTALLATION

OPTION 1: PENDANT - QP6171MBK


1 Install Rods

Optional Rods:


8 Feet Ceiling:
(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.




2 Tighten Hex Nut inside of the Ceiling Canopy




3 Install Ceiling Canopy to Upper Rod




4 Install Crossbar Assembly

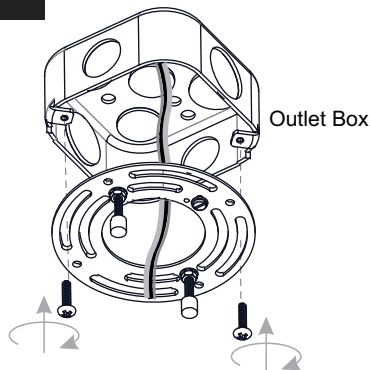


5 Wiring

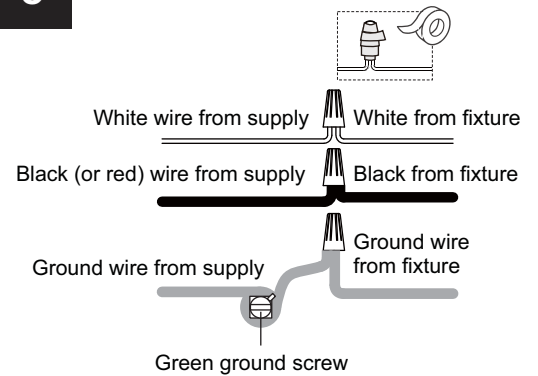

6 Install Ceiling Canopy to Crossbar Assembly

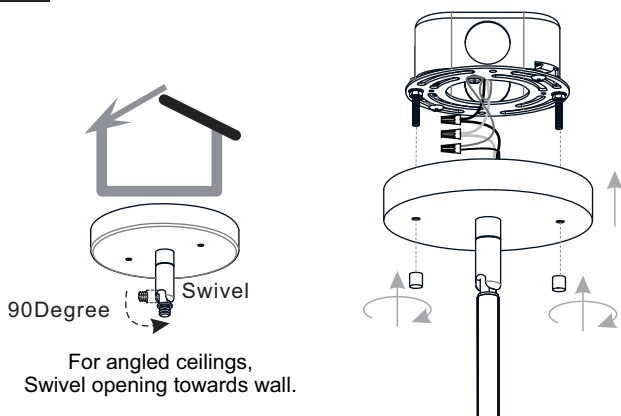



7 Install Shade and Glass Shade

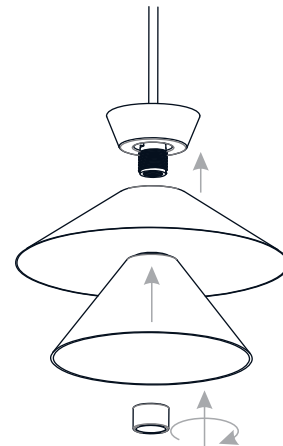

8 Install Bulb

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):

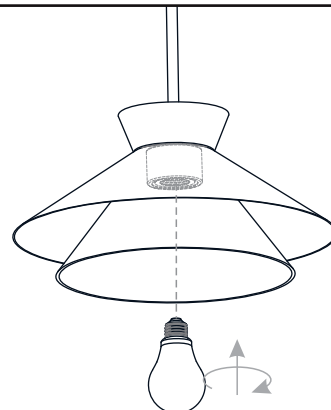


Your installation is now complete! Restore electricity and save this sheet for future reference.

INSTALLATION

IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.


OPTION 2: SEMI-FLUSH - QSF6171MBK

* Set aside (2) 6"L Rods, (2) 12"L Rods they are not required for the semi-flush installation.



1


Remove Swivel

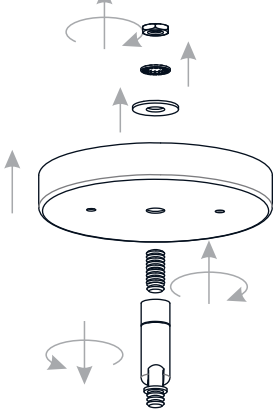

* Set aside the swivel since it is not required for the semi-flush installation.


2

Install Short Rod and Ceiling Canopy

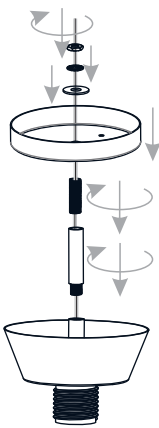

3


Install Crossbar Assembly

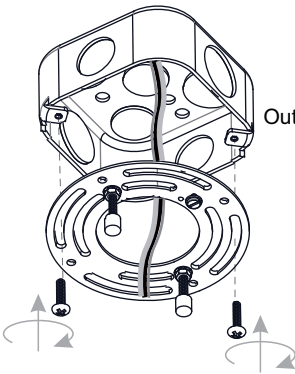

Outlet Box

4

Wiring

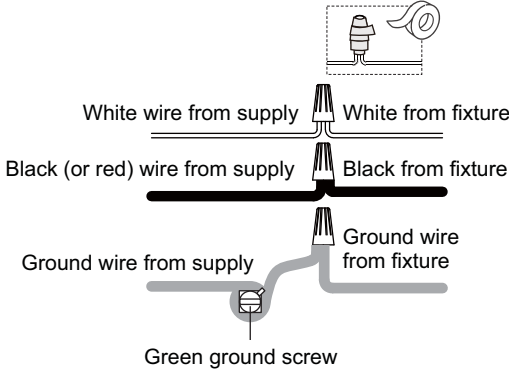

White wire from supply

White from fixture

Black (or red) wire from supply

Black from fixture


Ground wire from supply

Ground wire from fixture

Green ground screw


5

Install Ceiling Canopy to Crossbar Assembly

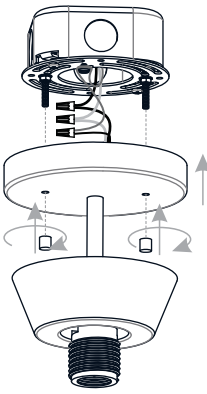

6

Install Shade and Glass Shade

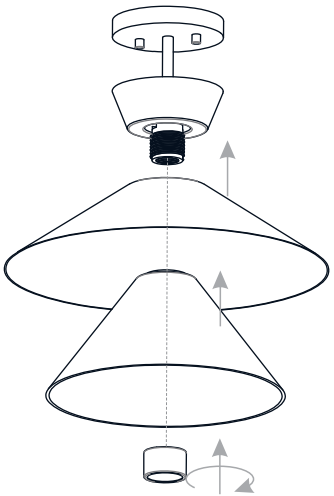


7 **Install Bulb**

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):

	
BULB BASE TYPE Medium (E26)	BULB TYPE TYPE A

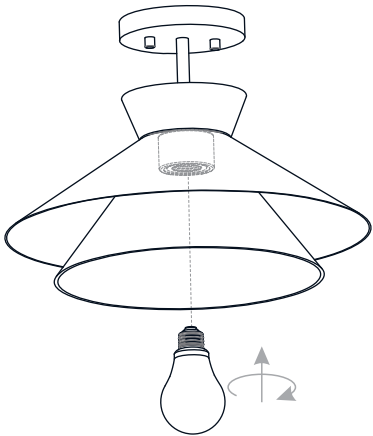

Your installation is now complete! Restore electricity and save this sheet for future reference.