

COMMERCIAL DOWNLIGHT MOUNTING PLATE



Model: 80-959

INSTALLATION AND SAFETY INSTRUCTIONS


IMPORTANT: Read before installing fixture. Retain for future reference.

NEW CONSTRUCTION OR EXISTING DOWNLIGHT INSTALLATION OPTIONS

1. Mount to 16" on-center wood ceiling joists.

2. Mount to 24" on-center wood ceiling joists.

3. Mount to 24" suspended ceiling "T" grid.

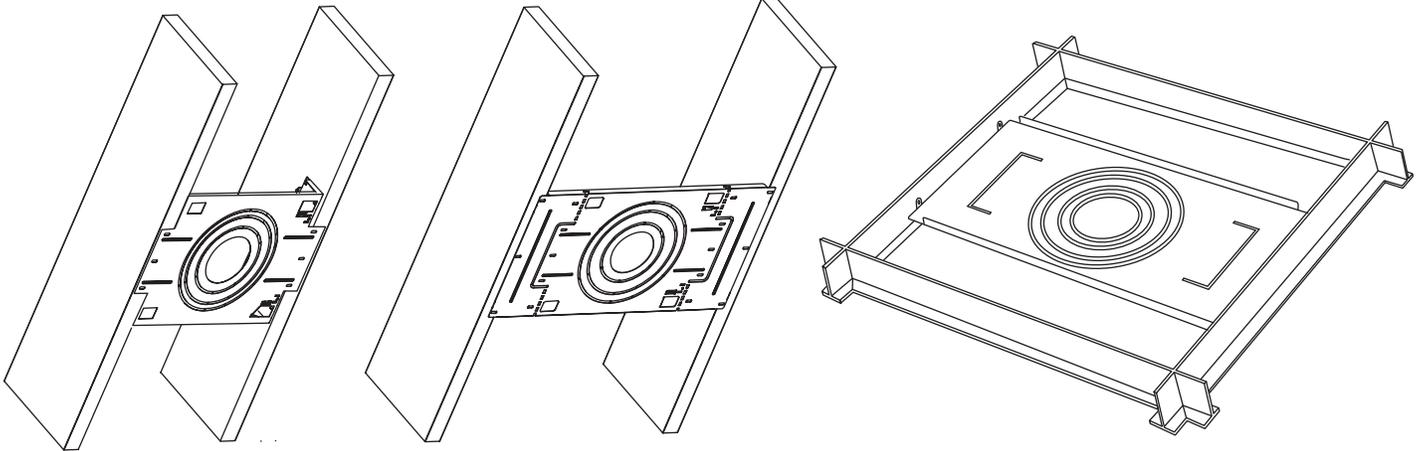

24" "T" Grid
Use mounting tabs with hole for 24" suspended ceiling "T" grid.

24" On-center joists
Use flap tabs for 24" on-center wood joists.

16" On-center joists
Cut flange and bend flaps up for 16" on-center wood joists.

Adjust knock-out diameter to match fixture.

For use with Satco LED Wattage and CCT Selectable Commercial Downlights

S11810–14.5WLED/CDL/4/ADJ-CCT/80D
S11811–23WLED/CDL/6/ADJ-CCT/80D
S11812–32WLED/CDL/8/ADJ-CCT/80D
S11813–46WLED/CDL/10/ADJ-CCT/80D

S11814–14.5WLED/CDL/4/ADJ-CCT/40D
S11815–23WLED/CDL/6/ADJ-CCT/40D
S11816–32WLED/CDL/8/ADJ-CCT/40D
S11817–46WLED/CDL/10/ADJ-CCT/40D