
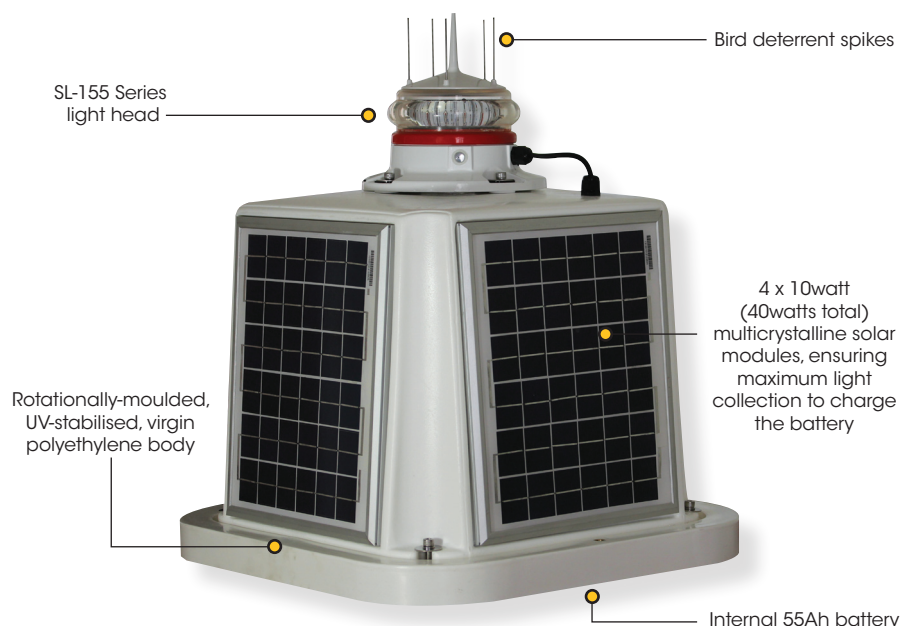


# 5-12NM Solar Marine Lantern

SL-C500

V1\_2015

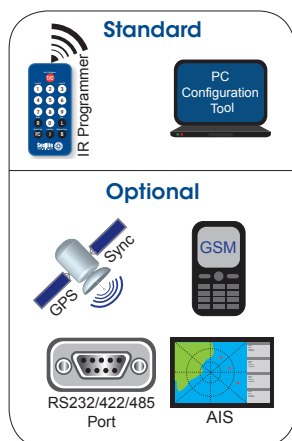

## The Sealite Advantage

- Up to 12NM visible range
- Multiple lens divergences for fixed or floating applications
- Complete unit — ready for immediate installation
- Impact & weather resistant polyethylene
- PC or IR Programmer for setup, diagnostic & testing

## The SL-C500 is a completely self-contained 5-12NM Solar LED Marine Lantern designed for a range of low-maintenance applications.

The light boasts a large internal battery compartment, a SL-155 Series LED light-head and 4 premium-grade 10 watt solar modules mounted to collect sunlight at all angles.

The SL-C500 is moulded from UV-stabilised, virgin polyethylene, providing enormous impact and weather resistance, in addition to high visibility IALA colours.

The user-friendly, 2-piece design allows the lantern to be opened for convenient battery inspection or replacement whilst the base remains fixed to the supporting structure.

### Advanced PC or IR Programming

Sealite's convenient PC Configuration Tool or IR programmer allows a host of features to be user set including:

- Multiple intensity settings
- 310 flash settings including custom character
- Automatic effective intensity adjustment
- Adjustable on/off lux levels
- Low battery threshold
- GPS synchronisation offset
- Alarm conditions

### Optional GPS Synchronisation

The SL-C500 may be fitted with an optional GPS module for flash synchronisation.

### Optional GSM Monitoring & Control System



The SL-C500 lanterns may also be fitted with a GSM Cell-Phone Monitoring and Control System – enabling users to access real-time diagnostics data and change lantern settings via cell-phone. The system can also be configured to send out alarm SMS text messages to designated cellular telephone numbers. Users can also have alarms and reports sent to designated email addresses.

### Optional Type 1 or Type 3 AIS



The SL-C500 lanterns are available with a class-leading integrated, low-powered Type 1 or Type 3 AIS. When fitted, the AIS is encapsulated within the body of the SL-155 to maintain the weatherproof integrity.

# 5-12NM Solar Marine Lantern

## SL-C500

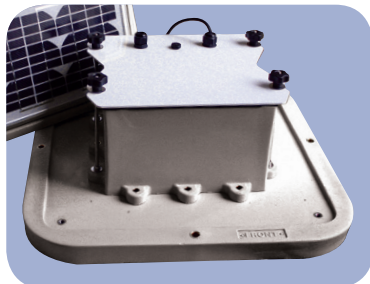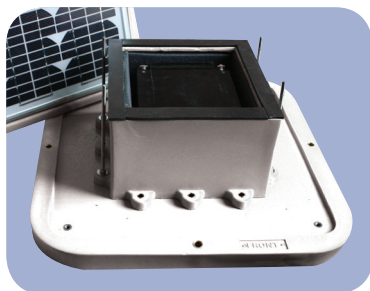

Convenient battery replacement

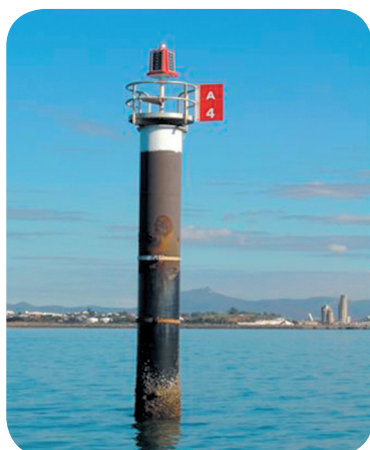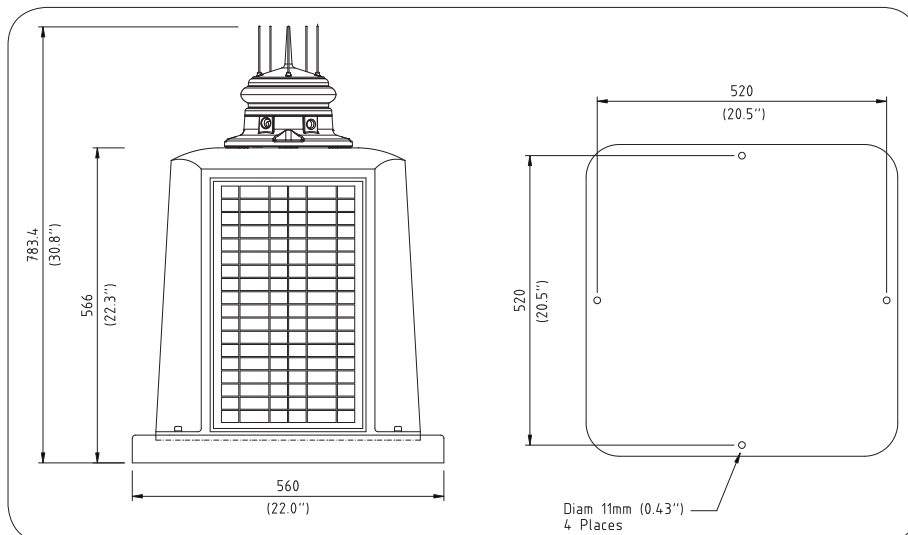

### SPECIFICATIONS \* \*

### SL-C500

#### Light Characteristics

Light Source  
Available Colours  
Typical Maximum Intensity (cd)†  
Visible Range (NM)

Horizontal Output (degrees)  
Vertical Divergence (degrees)  
Available Flash Characteristics  
Intensity Adjustments  
LED Life Expectancy (hours)

#### Electrical Characteristics

Current Draw (mA)  
Power (W)  
Circuit Protection  
Nominal Voltage (VDC)  
Autonomy (days)  
Temperature Range

#### Solar Characteristics

Solar Module Type  
Output (watts)  
Charging Regulation

#### Power Supply

Battery Type  
Battery Capacity (Ah)  
Nominal Voltage (V)

#### Physical Characteristics

Body Material  
Lens Material  
Lens Diameter (mm/inches)  
Lens Design  
Mounting  
Height (mm/inches)  
Width (mm/inches)  
Mass (kg/lbs)  
Product Life Expectancy

#### Certifications

CE  
IALA  
Quality Assurance  
Waterproof

#### Intellectual Property

Trademarks

#### Warranty \*

#### Options Available

SL-155-2.5D/5D/10D lantern  
Red, Green, White, Yellow  
Refer to Typical Maximum Intensity Table for SL-155 Series Lanterns  
AT @ 0.74: 5-12  
AT @ 0.85: 6.3-17.4  
0° - 360°  
2.5°, 5° or 10°  
Up to 310 including 256 IALA recommended, & 1 custom  
User adjustable  
>100,000

Refer to Sealite Power Calculator  
Refer to Sealite Power Calculator  
Polarity protected  
12  
>20 (14 hour darkness, 12.5% duty cycle)  
-40 to 80°C

Multicrystalline  
40 (4 x 10watt)  
Microprocessor controlled

Gel SLA  
55  
12

Rotationally-moulded UV-stabilised virgin polyethylene  
UV-stabilised acrylic  
From 171 / 6¾  
Multiple LED optic  
4 x 11mm mounting holes  
From 675 / 26½  
560 / 22  
From 23 / 50.7  
Up to 12 years

EN61000-6-3:1997. EN61000-6-1:1997  
Signal colours compliant to IALA E-200-1  
ISO9001:2008  
IP68 light-head

SEALITE® is a registered trademark of Sealite Pty Ltd  
3 years

- SL-125 Series Lantern
- 200mm bolt pattern mounting plate
- GPS Synchronisation
- AIS Remote Monitoring
- GSM Monitoring & Control System
- RS232/422/485 Port
- General purpose inputs (2) & outputs (2)



\* Specifications subject to change or variation without notice  
\* Subject to standard terms and conditions  
† Intensity setting subject to solar availability