

# LED FIXTURE

## SEL Series



## LED Linear High Bay SEL-LHB

Offering quality lighting and excellent energy savings compared to linear fluorescent and HID high bay fixtures.



5-year limited warranty

Operating temperature range -20 °C ~ +50 °C



### Features & Benefits

cUL listed

System light efficacy 150 LPW, 120-347V auto-sensing driver

10' white cord, 10' aircraft cable (set)


Formed steel housing with white powder coat finish/ frosted lens

0-10V dimming, product can dim down to 10%

CRI≥80, 120° beam spread, L70 @ 100,000 hrs

Damp location rated

### Dimensional Drawing

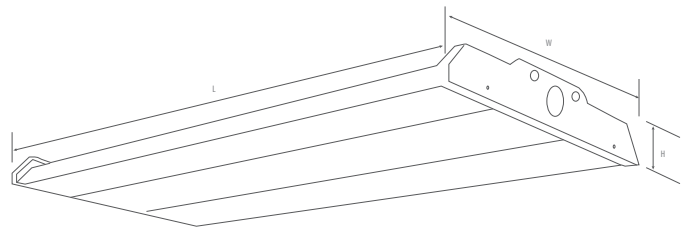

L	W	H
46.5"	22.9"	2.2"

### Ordering Information Example: SEL-LHB/540XL/40/120-347V/AC/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable
SEL	LHB (Linear high bay)	540XL (540W)	40 (4000K)	120-347V	AC (Aircraft cable 10' set)	D (0-10V dimming)

### Product Specification

Model Number	Wattage (W)	Input Voltage(V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
SEL-LHB/540XL/40/120-347V/AC/D	540	120-347V	100,000	81000	4000	>80	46.5" x 22.9" x 2.2"	1