

UL LED Troffer Light(0-10V Dimming)



PF
>0.9

CRI
>80





Specifications

Model	CCT	SIZE (feet)	Color	LED Type	Lumen(lm) (±10%)	CRI	Beam angle	Power(W) (±10%)	Voltage (V)	Dimmer	Current (A)	PF
TR-GLM-040-AW-6060S-01CE	5000K	2*2	cool white	2835	4200 lm	≥80	110°	40W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-040-AW-6060S-01NE	4000K	2*2	natural white		4140 lm	≥80	110°					
TR-GLM-040-AW-6060S-01WE	3000K	2*2	warm white		4040 lm	≥80	110°					
TR-GLM-030-AW-6060H-01CE	5000K	2*2	cool white	2835	3810 lm	≥80	110°	30W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-030-AW-6060H-01NE	4000K	2*2	natural white		3750 lm	≥80	110°					
TR-GLM-030-AW-6060H-01WE	3000K	2*2	warm white		3720 lm	≥80	110°					
TR-GLM-040-AW-6060H-01CE	5000K	2*2	cool white	2835	5200 lm	≥80	110°	40W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-040-AW-6060H-01NE	4000K	2*2	natural white		5080 lm	≥80	110°					
TR-GLM-040-AW-6060H-01WE	3000K	2*2	warm white		5040 lm	≥80	110°					
TR-GLM-050-AW-6012S-01CE	5000K	2*4	cool white	2835	5200 lm	≥80	110°	50W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-050-AW-6012S-01NE	4000K	2*4	natural white		5100 lm	≥80	110°					
TR-GLM-050-AW-6012S-01WE	3000K	2*4	warm white		5000lm	≥80	110°					
TR-GLM-040-AW-6012H-01CE	5000K	2*4	cool white	2835	5080 lm	≥80	110°	40W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-040-AW-6012H-01NE	4000K	2*4	natural white		5040 lm	≥80	110°					
TR-GLM-040-AW-6012H-01WE	3000K	2*4	warm white		5000 lm	≥80	110°					
TR-GLM-050-AW-6012H-01CE	5000K	2*4	cool white	2835	6350 lm	≥80	110°	50W	AC100-277V 50/60Hz	0-10V	0.5	>0.95
TR-GLM-050-AW-6012H-01NE	4000K	2*4	natural white		6300 lm	≥80	110°					
TR-GLM-050-AW-6012H-01WE	3000K	2*4	warm white		6250 lm	≥80	110°					

Applications

General lighting such as offices,hotels,home,shops,hospitals,schools.


Dimensions (Unit: feet)

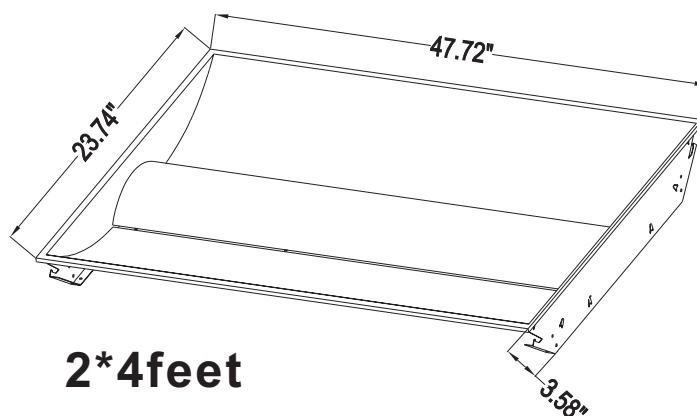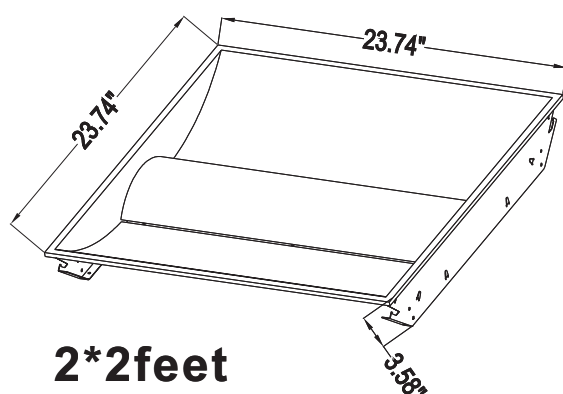

All dimension tolerance is $\pm 0.5\text{mm}$ unless otherwise noted.







Electrical Connection

2*2feet /2*4feet

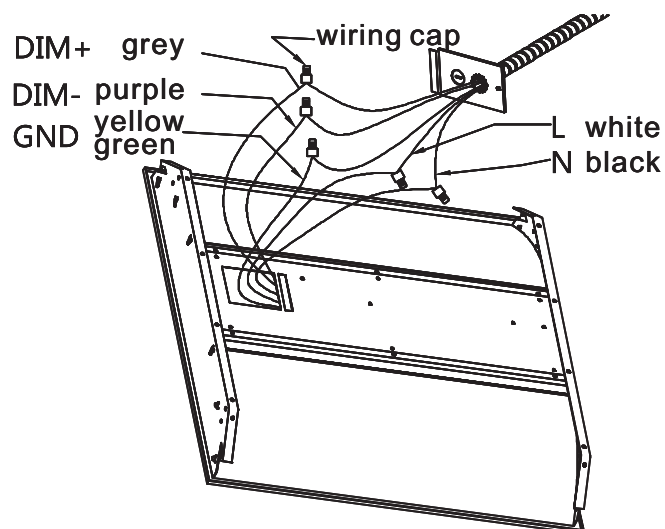

Installation Instructions

Embedded Installation

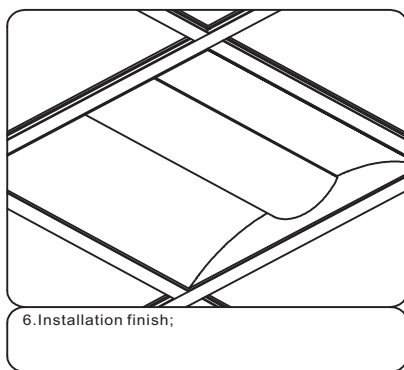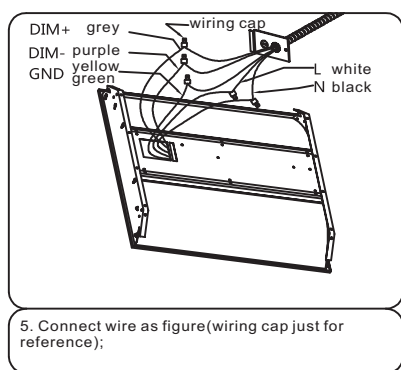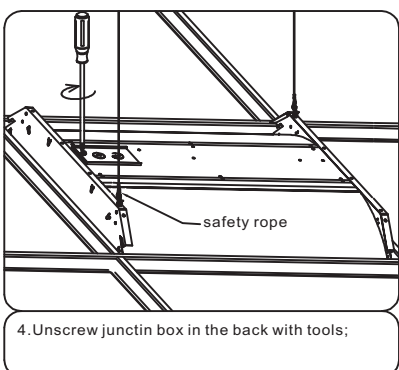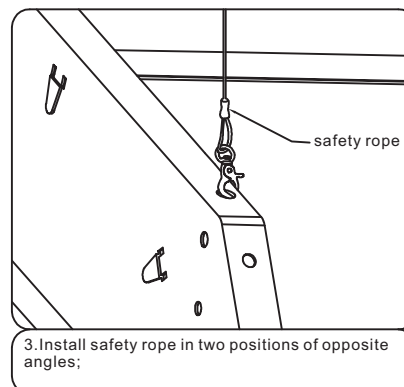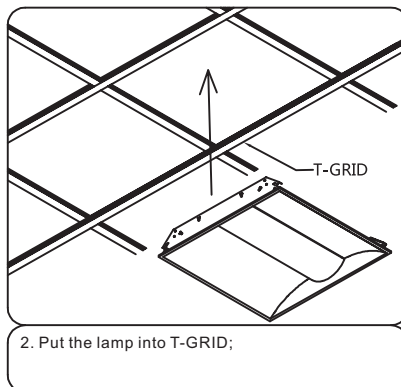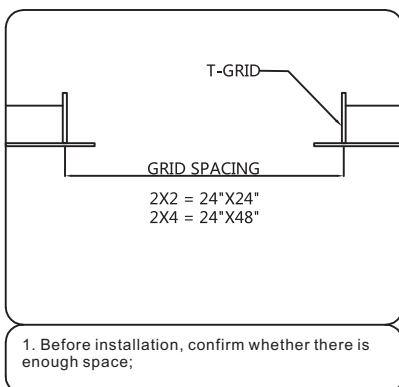

Product packaging information:

2*2	2*4
• Net weight/PC:3.5 kg • Gross weight/CTN: 17.6 kg • Inner size: L687*W670*H252mm • Carton size: L700*W540*H720mm • 2pcs/inner box,2 inner boxes/carton.	• Net weight/PC: 6.9 kg • Gross weight/CTN: 18.92 kg • Inner size: L1308*W687*H246mm • Carton size: L1332*W270*H716mm • 2pcs/inner box,1 inner boxes/carton

Notice

- 1.Please read the specification first, to make sure the service environment matches the condition in the specification before using.
- 2.Please confirm the applicable power supply before using.
- 3.Make sure the switch of product is off before connect to the power supply to prevent electric shock.
- 4.Operation against rules may damage your property even harm to your personal safety.
- 5.Preliminarily estimate required quantity of LED troffer lights, then according to the power rating of single troffer light to figure out the total power and design power supply plan.
- 6.Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- 7.If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.