




# 40W LED Panel (2x2), 5000K

Order Code: PN41258



## Description

The Venture Lighting LED panel series of luminaires are low profile, lightweight, and designed for long life and low maintenance. These are designed to quickly and easily upgrade existing fluorescent fixtures.

## Construction

The high performance LED source is mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency.

## Optics

The fixtures are designed to have low glare yet utilize high performance materials to maximize efficacy and achieve precise photometric distributions.

## Electrical

The power supply has a range of 120-277V, 50/60 Hz. 0-10V DC dimming capability is standard. The fixture is rated for damp and dry locations. Fixtures are IC-rated. Driver input voltage terminal block can use 12 to 22 wire gauge. Driver output voltage terminal block can use 16 to 22 wire gauge.

## Mounting

The fixture is designed for replacing fluorescent fixtures.

DLC Model# PD22-40C-ANR-X00

## Product Performance

|                                    |                                |
|------------------------------------|--------------------------------|
| Wattage                            | 40W                            |
| Lumen Output                       | 4735                           |
| Correlated Color Temperature (CCT) | 5000K                          |
| Color Rendering Index (CRI)        | 80+                            |
| Life Hours                         | 50,000                         |
| Operating Temperature Range        | -25°C to 45°C (-13°F to 113°F) |

## Physical Characteristics

|               |          |
|---------------|----------|
| Fixture Color | White    |
| Weight        | 7.65 lbs |
| Width         | 23.7"    |
| Length        | 23.7"    |
| Height        | 1.9"     |
| Panel Size    | 2x2      |

## Electrical Characteristics

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Amperage Draw (Input Volts/Amps) | 120/0.34 208/0.20 240/0.17 277/0.15 |
|----------------------------------|-------------------------------------|

## Regulatory Qualifications

cULus Listed

DLC Qualified - Model# PD22-40C-ANR-X00

IC-rated

## Accessories

KT14156 2X2 SURFACE MOUNT KIT, WHITE


KT18101 2x2 DRYWALL MOUNT KIT, WHITE

BB23468 – LED Fixture Battery Back-up



# Venture 40W LED Panel (2x2), 5000K

## 40W 2x2 LED Panel

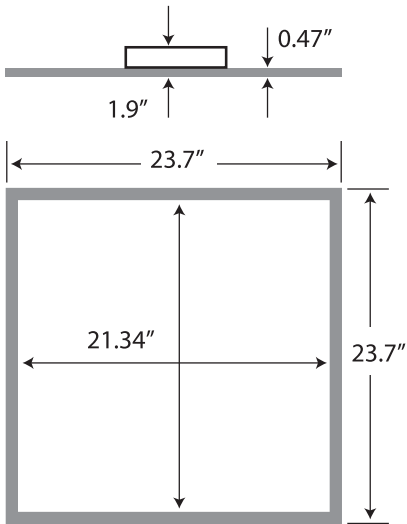

(800) 451-2606  
Fax: (800) 451-2605  
2451 Enterprise Parkway East  
Twinsburg, Ohio 44087 USA  
E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
[VentureLighting.com](http://VentureLighting.com)

