


80W LED Traditional Style Wallpack

Order Code: WP31268





	Length	9.92"
	Height	9.25"
Electrical Characteristics		

Amperage Draw (Input Volts/Amps)	120/0.69 208/0.40 240/0.35 277/0.30
Regulatory Oualifications	

cULus Listed DLC Qualified - Model# WH3-80AA-40 IP65, suitable for wet location

Accessories SP12714 - 120-277V Surge Protector PH56903 - Button Photocell (120-277V)



Description

Venture Lighting's Wallpack luminaires are low profile, light weight, and designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easilyupgrade existing HID wall pack fixtures.

Construction

Rugged die cast housing finished in a durable powder coat finish and with polycarbonate lens. The high performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. The fixture has a gasket sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. The luminaires are IP65 rated, suitable for wet locations. Button photocell accessory can easily be mounted into the fixture. Fixture is not dimmable.

Mounting

Fixture can easily be wall mounted to a recessed junction box or be wall mounted and accept a 1/2" NPT surface mounted conduit. The 80W Venture LED traditional style wallpack has the same footprint as HID 250W wallpacks.

NOTE:


*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11








Venture 80W LED Traditional Style Wallpack

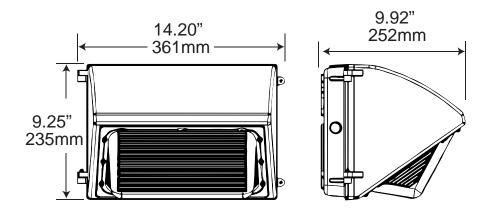

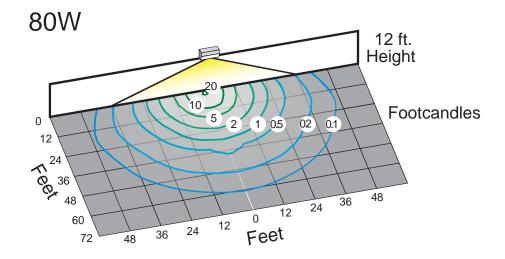

(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

