



## Technical Specifications

	Model No.:	<b>OW0608G-2-20-853-BK</b>
OPTICAL	Input power	40W/30W/20W Selectable
	Lumen	2800lm/2100lm/1400lm
	Lumen Efficiency	70 LM/W
	CCT	3000K/4000K/5000K Adjustable
	CRI	>80
	Viewing Angle	25 Degree
ELECTRICAL	Input Voltage	120-347 V
	PF	>0.95
	THD	<%20
	Driver Brand	Factory Driver
MATERIALS	LED Type	COB
	LED QTY	2PCS
	Housing	Aluminium
	Housing Color	BLACK
	Cover	Clear Glass Lens
	Waterproof Rating	ETL WET Location, IP54
	IK Rating	/
OTHERS	Operating Temperature	-25°C to 40°C
	Operating Humidity	%10-%90 RH
	Storage Temperature	-25°C to 50°C
	Storage Humidity	%10-%95 RH
	Warranty Time	5 years


### Advantage

- ETL & cETL certificate.
- New design of combine switch for multiple selection.
- Input voltage 120-347Vac
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, Long lifespan. Excellent distribution and uniformity.
- Light is soft and uniform, Safe to eyes.  
Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.
- Color Adjustable. 0-10 V Dimming.

### Application

Widely used in parks, garden, underground parking lot, warehouse, garage; Work floor, factory and so on.

### Dimensions

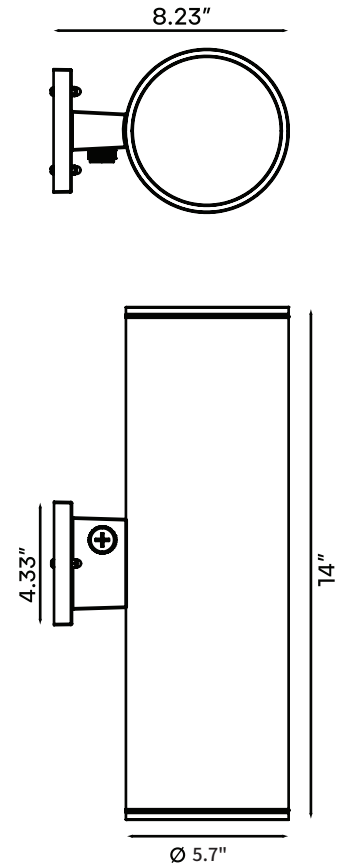

### Light Distribution Testing Parameters

