

Votatec


Innovation & Quality

UFO HIGH BAY LIGHT



YRUFO-150550-002

YRUFO-200550-002

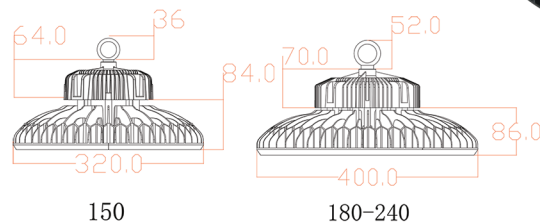


Features

- Using famous brand SMD3030 as light source.
- Special thermal conductive materials
- 100-277V AC wide pressure to adapt to various environment
- Application places: workshop, warehouse, highway, etc
- Have solid light source, strong shock resistance, convenient for transportation and installation, high safety



Flux Chart / Light Distributing Curve

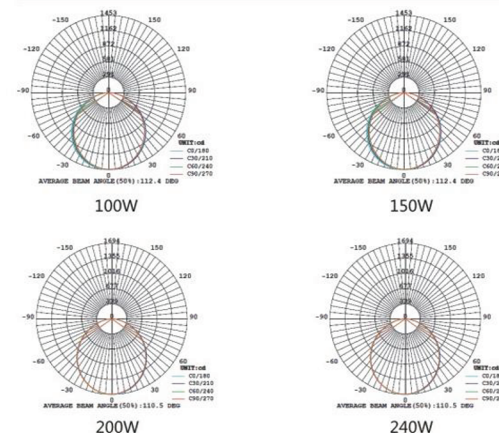

Lamp Parameter

Size	Ø280*H165 mm	Ø320*H184mm	Ø400*H208mm	Ø400*H208mm
Power	100W	150W	200W	240W
LED Quantity	119PCS	175PCS	238PCS	238PCS
Certification	ETL DLC			
Efficiency(%)	≥89%			
LED Type	SMD3030			
Luminous Efficiency	120-130lm/W±10%			
Power Factor	>0.9			
Rendering Index	>80			
Input voltage	100-277VAC 50-60Hz			
CCT(K)	2700-6500K			
IP Grade	IP65			
Light emitting angle	60°/90°/120°			
N.W.	5.8kg	6.8kg	9.1kg	9.1kg

Storage And Working Environment

Storage temperature	-20°C~+65°C
Operating temperature	-20°C~+45°C (the best in 25°C)
Environment humidity	40-90%RH

Lifespan And Warranty

Life Span	50,000H
Quality Warranty	5 years

